

MINISTRY OF EDUCATION SOUTHERN PROVINCE

BIDDING DOCUMENT FOR

RENOVATION OF TEACHERS' & STUDENTS' TOILETS AT G/SIRI ABEYTHISSA M.V.

Issued to	:
Date	:
Contract No	:

Employer

The Secretary,
Ministry of Education- Southern Province,
Ground Floor, "Dakshinapaya",
Ministry Complex,
Labuduwa, Galle

CONTENT

Volume 1

Section 1	Instructions to Bidders
Section 2	Standard Forms (Contract)
Section 3	Conditions of Contract

Volume 2

	Invitation for Bids
Section 4	Form of Bid and Qualification Information
Section 5	Schedule
Section 6	Specifications
Section 7	Bills of Quantities
Section 8	Drawings
Section 9	Standard Forms (Bid)

Volume 1 consisting of section 1, section 2, section 3 will be applicable for this contract shall be given volume 1 of "Standard Bidding Document, Procurement of Works, Minor Contracts", CIDA publication no: CIDA/SBD/03, Second Edition, January 2007, publish by Construction Industry Development Authority (CIDA), Savusiripaya, 123. Wijerama Mawatha, Colombo 07.

The above Document will not be issued with the Bidding Document and Bidder is advised to purchase it from CIDA.

G/CSL/25/06/1	
	INVITATION FOR BIDS
	INVITATION FOR DIDS
-	

පුසම්පාදන දැන්වීම

දකුණු පළාත් අධාාපන, ඉඩම් හා ඉඩම් සංවර්ධන,මහා මාර්ග හා පුවෘත්ති අමාතාහාංශය දකුණු පළාත් සභාව

පළාත් නිශ්චිත සංවර්ධන පුදාන, ක්ලීන් ශී ලංකා වැඩසටහන හා නඩත්තු සැලැස්ම 2025 යටතේ කියාත්මක කරනු ලබන පහත සඳහන් වැඩ යෝජනා සඳහා සුදුසුකම් ලත් කොන්තුාත් කරුවන්ගෙන්, දකුණු පළාත් අධාාපන අමාතාහංශයේ පුසම්පාදන කමිටු සභාපති විසින් ලංසු පත් කැඳවනු ලැබේ.

අ	වාහාපෘති	පාසල	වැඩ විස්තරය	කර්මාන්	ආපසු	ලංසු	අවශා	මුළු
නු	අංකය			තය ඉටු	නොගෙව	සුරක්ෂණ	CID	පිරිවැය
q٠				කරනු	නු ලබන	වටිනාකම	A	ඇස්තමේ
ක				ලබන	ඇප	රු.	ලියාප	න්තු මුදල
ය				වාහාපෘති	තැන්පත්		දිංචිය	vat සමග
				සැලැස්ම	මුදල රු.			රු. මි.
1	G/C/25/34	ගා/උඩුගම ම.වි	70*25 ඉදමහල්	පළාත්				
			ගොඩනැහිල්ලේ	නිශ්චිත	2 500 00	24 000 00	C 8	4.2.4
			වහල		2,500.00	34,000.00	හෝ ඉහළ	4.34
			අලුත්වැඩියාව				v	
2	G/C/25/35	ගා/හියාරේ	90*25	පළාත්				
		නැහෙනහිර ක.වි	ගොඩනැහිල්ලේ	නිශ්චිත	1 500 00	26,000,00	C 9	2.40
			කොරිඩෝව		1,500.00	26,000.00	හෝ ඉහළ	3.40
			ඉදිකිරීම					
3	G/C/25/36	ගා/තිත්තගල්ල	180*25 පුධාන	පළාත්			C 8	
		අටානිකිත ක.වි	ශාලාවේ වහල	නිශ්චිත	2,500.00	35,000.00	හෝ	4.41
			අලුත්වැඩියාව				ඉහළ	
4	G/C/25/37	ගා/හපුගල පුා.වි	මායිම් තාප්පය	නඩත්තු	1 500 00	27 000 00	C 9	2.46
			ඉදි කිරීම	සැලැස්ම	1,500.00	27,000.00	හෝ ඉහළ	3.46
5	G/C/25/38	ගා/නරාවල ම.වි	80*20	නඩත්තු			C 8	
			ගොඩනැහිල්ල	සැලැස්ම	2,500.00	32,000.00	හෝ	4.10
			අලුත්වැඩියාව				ඉහළ	
6	G/C/25/39	ගා/ප∘චාලිය පුා.වි	පාසල්	නඩත්තු			C 9	
			ගොඩනැහිල්ල	සැලැස්ම	1,500.00	21,000.00	ග ෝ	2.73
			අලුත්වැඩියාව				ඉහළ	
7	G/C/25/40	ගා/කළාහාණතිස්ස	80*20	නඩත්තු				
		විදාහාලය	ගොඩනැහිල්ලේ	සැලැස්ම	1,500.00	22,000.00	C 9 හෝ	2.88
			වහල		1,500.00	22,000.00	ඉහළ	2.00
	Q1Q125:::		අලුත්වැඩියාව					
8	G/C/25/41	ගා/ජයවර්ධන	80*20	නඩත්තු			C 9	
		විදාහලය	ගොඩනැහිල්ල	සැලැස්ම	1,500.00	25,000.00	හෝ නෙක	3.14
			අලුත්වැඩියාව				ඉහළ	

	G/CSL/25/06	5/1						
9	G/C/25/42	ගා/පැදින්නොරුව සරණපාල ජයන්ති පුා.වි	60*20 ගොඩනැහිල්ලේ වහල අලුත්වැඩියාව	නඩත්තු සැලැස්ම	1,500.00	26,000.00	C 9 හෝ ඉහළ	3.35
10	G/C/25/43	ගා/ඇත්තිලිගොඩ සුදර්ශි ම.වි	100*25 ගොඩනැහිල්ලේ වහල අලුත්වැඩියාව	නඩත්තු සැලැස්ම	1,500.00	30,000.00	C 9 හෝ ඉහළ	3.91
11	G/C/25/44	ගා/මීගහගොඩ ක.වි	50*20 විදාහගාර ගොඩනැහිල්ලේ වහල අලුත්වැඩියාව	නඩත්තු සැලැස්ම	1,500.00	31,000.00	C 9 හෝ ඉහළ	3.93
12	G/C/25/45	ගා/කඩිහිංගල ම.වි	70*20 දෙමහල් ගොඩනැහිල්ලේ විදුලි පද්ධතිය නවීකරණය	නඩත්තු සැලැස්ම	1,500.00	17,000.00	C 9 හෝ ඉහළ	2.12
13	G/C/25/46	අම්බලන්ගොඩ කලාප අධාාපන කාර්යාලය	කාර්යාල ගොඩනැහිල්ල අලුත්වැඩියාව	නඩත්තු සැලැස්ම	1,500.00	20,000.00	C 9 හෝ ඉහළ	2.49
14	G/C/25/47	ගා/වටරැක ශී සෝහිත විදාහලය	40*20 ගොඩනැහිල්ල අලුත්වැඩියාව	නඩත්තු සැලැස්ම	1,500.00	25,000.00	C 9 හෝ ඉහළ	3.22
15	G/C/25/48	ගා/විදාහනන්ද ක.වි	පැති බැම්ම අලුත්වැඩියාව	නඩත්තු සැලැස්ම	2,500.00	34,000.00	C 8 හෝ ඉහළ	4.40
16	G/C/25/49	ගා/උනන්නවිටිය රේවත ම.වි	90*20 ගොඩනැඟිල්ල අලුත්වැඩියාව	නඩත්තු සැලැස්ම	2,500.00	36,000.00	C 8 හෝ ඉහළ	4.66
17	G/C/25/50	ගා/සිරි පඹංකර පුා.වි	80*20 ගොඩනැහිල්ලේ වහල අලුත්වැඩියාව	නඩත්තු සැලැස්ම	1,500.00	25,000.00	C 9 හෝ ඉහළ	3.15
18	G/C/25/51	ගා/බටදුව සිරි රතනජෝති ම.වි	90*25 ගොඩනැඟිල්ල අලුත්වැඩියාව	නඩත්තු සැලැස්ම	1,500.00	26,000.00	C 9 හෝ ඉහළ	3.28
19	G/C/25/52	ගා/අක්මීමණ ම.වි	100*20 ගොඩනැඟිල්ල අලුත්වැඩියාව	නඩත්තු සැලැස්ම	2,500.00	38,000.00	C 8 හෝ ඉහළ	4.97
20	G/C/25/53	ගා/ආනන්ද විජය විදාහලය	90*25 ගොඩනැහිල්ලේ	නඩත්තු සැලැස්ම	1,500.00	25,000.00	C 9 හෝ ඉහළ	3.21

	G/CSL/25/0	6/1						
			වහල අලුත්වැඩියාව					
21	G/C/25/54	ගා/ඉඳුරුව ම.වි	120*20 ගොඩනැහිල්ල අලුත්වැඩියාව	නඩත්තු සැලැස්ම	3,000.00	49,000.00	C 8 හෝ ඉහළ	6.47
22	G/C/25/55	ගා/තලංගහ සරස්වතී දෙමළ පාසල	වැසිකිළ පද්ධතිය ඉදි කිරීම	පළාත් නිශ්චිත	1,000.00	16,000.00	C 9 හෝ ඉහළ	1.99
23	G/C/25/56	ගා/දික්කුඹුර සිද්ධාර්ථ ම.වි	120*30 පුධාන ශාලාව නවීකරණය	පළාත් නිශ්චිත	2,500.00	40,000.00	C 8 හෝ ඉහළ	5.29
24	G/C/25/57	ගා/ලේල්වල ක.වි	80*20 ගොඩනැහිල්ල අලුත්වැඩියාව	පළාත් නිශ්චිත	3,500.00	75,000.00	C 8 හෝ ඉහළ	9.93
25	G/C/25/58	ගා/පොරවගම ක.වි	පැති බැම්ම අලුත්වැඩියාව	පළාත් නිශ්චිත	2,500.00	34,000.00	C 8 හෝ ඉහළ	4.39
26	G/C/25/59	ගා/ගතේගම රෝමානු කතෝලික පාසල	80*20 නව ගොඩනැහිල්ල ඉදි කිරීම	පළාත් නිශ්චිත	1,500.00	20,000.00	C 9 හෝ ඉහළ	2.60
27	G/C/25/60	ගා/ශීපති ම.වි	80*20 දෙමහල් ගොඩනැහිල්ල ඉදි කිරීම	පළාත් නිශ්චිත	2,500.00	37,000.00	C 8 හෝ ඉහළ	4.79
28	G/C/25/61	ගා/මාමනදොළ ක.වි	90*20 ගොඩනැහිල්ලේ වහල අලුත්වැඩියාව	පළාත් නිශ්චිත	2,500.00	32,000.00	C 8 හෝ ඉහළ	4.15
29	G/C/25/62	ගා/උක්වත්ත විදාහලය	90*25 තෙමහල් ගොඩනැහිල්ලේ ඉදි කිරීම (ඉතිරි වැඩ)	පළාත් නිශ්චිත	2,500.00	41,000.00	C 8 හෝ ඉහළ	5.42
30	G/C/25/63	ගා/අක්කරවිස්ස ක.වි	මායිම් තාප්පය අලුත්වැඩියාව	පළාත් නිශ්චිත	1,500.00	25,000.00	C 9 හෝ ඉහළ	3.21
31	G/C/25/64	ගා/කළුවලගල ක.වි	40*20 ගොඩනැහිල්ල ඉදි කිරීම	පළාත් නිශ්චිත	3,000.00	46,000.00	C 8 හෝ ඉහළ	6.07

	G/CSL/25/06/	1						
32	G/C/25/65	ගා/අවිත්තාව තාලන්දා ම.වි	80*20 ගොඩනැහිල්ලේ වහල අලුත්වැඩියාව	පළාත් නිශ්චිත	1,500.00	29,000.00	C 9 හෝ ඉහළ	3.73
33	G/C/25/66	ගා/මහින්ද රාජපක්ෂ ම.වි	මායිම් තාප්පය අලුත්වැඩියාව	පළාත් නිශ්චිත	3,000.00	61,000.00	C 8 හෝ ඉහළ	7.88
34	G/C/25/67	ගා/ගුණාතන්ද පුා.වි	50*25 ගොඩනැඟිල්ල අලුත්වැඩියාව	පළාත් නිශ්චිත	1,500.00	17,000.00	C 9 හෝ ඉහළ	2.16
35	G/C/25/68	ගා/බී.ටී.එස් විදාහලය	80*20 ගොඩනැහිල්ල අලුත්වැඩියාව	නඩත්තු සැලැස්ම	2,500.00	32,000.00	C 8 හෝ ඉහළ	4.07
36	G/C/25/69	ගා/මාවඩවීල ම.වි	90*25 ගොඩනැඟිල්ල අලුත්වැඩියාව	නඩත්තු සැලැස්ම	1,500.00	24,000.00	C 9 හෝ ඉහළ	3.01
37	G/C/25/70	ගා/සිරිතිවාස ම.වි	100*20 ගොඩනැහිල්ලේ වහල අලුත්වැඩියාව	නඩත්තු සැලැස්ම	2,500.00	40,000.00	C 8 හෝ ඉහළ	5.31
38	G/C/25/71	ගා/දොළහේත ක.වි	80*20 ගොඩනැහිල්ලේ වහල අලුත්වැඩියාව	නඩත්තු සැලැස්ම	2,500.00	43,000.00	C 8 හෝ ඉහළ	5.69
39	G /C/25/72	ගා/පිලාන තක්ෂිලා පුා.වී.	මායිම් තාප්පය නවීකරණය	පළාත් නිශ්චිත	1,000.00	14,000.00	C9 හෝ ඉහළ	1.8
40	G /C/25/73	ගා/සංඝරතන පුා.වි.	100*20 ගොඩනැගිල්ලේ වහල අලුත්වැඩියාව.	පළාත් නිශ්චිත	2,500.00	34,000.00	C8 හෝ ඉහළ	4.4
41	G/C/25/74	ගා/තෙලිකඩ ම.වී.	80*20 ගොඩනැගිල්ලේ වහල අලුත්වැඩියාව	පළාත් නිශ්චිත	2,500.00	35,000.00	C8 හෝ ඉහළ	4.5
42	G/C/25/75	ගා/කරන්දෙණිය ක.වි.	80*20 ගොඩනැගිල්ල අලුත්වැඩියාව	පළාත් නිශ්චිත	1,500.00	29,000.00	C9 හෝ ඉහළ	3.7
43	G/C/25/76	ගා/ලේතගල්පලා ත ක.වි.	80*20 ගොඩනැගිල්ල අලුත්වැඩියාව	පළාත් නිශ්චිත	1,500.00	27,000.00	C9 හෝ ඉහළ	3.4
44	G /C/25/77	ගා/රතනසාර ම.වි.	100*20 ගොඩනැගිල්ලේ වහල අලුත්වැඩියාව	පළාත් නිශ්චිත	1,500.00	23,000.00	C9 හෝ ඉහළ	2.9

15	G /C/25/78	ගා/යටගල ම.වි.	මායිම් තාප්පය අලුත්වැඩියා කිරීම.	පළාත් නිශ්චිත	2,500.00	39,000.00	C8 හෝ ඉහළ	5.1
-6	G /C/25/79	ගා/ඕල්කට් ම.වි	80*20 ගොඩනැගිල්ල අලුත්වැඩියාව	පළාත් නිශ්චිත	2,500.00	40,000.00	C8 හෝ ඉහළ	5.3
.7	G /C/25/80	ගා/තෙල්ලඹුර විජය ක.වි.	පැති බැම්ම ඉදි කිරීම.	පළාත් නිශ්චිත	2,500.00	34,000.00	C8 හෝ ඉහළ	4.3
8	G /C/25/81	ගා/හියාරේ ම.වි.	80*20 ගොඩනැගිල්ලේ වහල අලුත්වැඩියාව	පළාත් නිශ්චිත	2,500.00	45,000.00	C8 හෝ ඉහළ	5.8
.9	G /C/25/82	ගා/උස්වතුන් හසානා ම.වි.	160*25 තෙමහල් ගොඩනැහිල්ලේ වහල අලුත්වැඩියාව.	පළාත් නිශ්චිත	2,500.00	34,000.00	C8 හෝ ඉහළ	4.4
50	G /C/25/83	ගා/බුද්ධදත්ත පුා.වි.	120*20 පුධාන ශාලාව අලුත්වැඩියාව	පළාත් නිශ්චිත	3,500.00	64,000.00	C8 හෝ ඉහළ	8.4
51	G /C/25/84	ගා/සිරි අහයතිස්ස ක.වි.	දෙමහල් ගොඩනැහිල්ලේ යකඩ ගුීල් සවි කිරීම.	නඩත්තු සැලැස්ම	1,000.00	16,000.00	C9 හෝ ඉහළ	1.9
52	M/C/25/31	මාර/පර්සි අබේවර්ධන විදාහලය	80*20 ගොඩනැහිල්ලේ වහල අලුත්වැඩියාව.	නඩත්තු සැලැස්ම	2,500.00	40,000.00	C8 හෝ ඉහළ	5.3
53	M/C/25/44	මාර/ජිනරාජ ක.වි.	වැසිකිළි පද්ධතිය අලුත්වැඩියා කිරීම.	පළාත් නිශ්චිත	1,500.00	22,000.00	C9 හෝ ඉහළ	2.1
54	M/C/25/52	අකුරැස්ස කලාප අධාාපන කාර්යාලය	පැති බැම්ම පුතිසංස්කරණය කිරීම	නඩත්තු සැලැස්ම	1,500.00	28,000.00	ි C 9 හෝ ඉහළ	3.59
55	M/C/25/53	මාර/කරගොඩ උයන්ගොඩ ම.වි	වැසිකිළි පද්ධතිය ඉදි කිරීම	පළාත් නිශ්චිත	1,500.00	20,000.00	C 9 හෝ ඉහළ	2.57
66	M/C/25/54	මාර/බැරගම ක.වි	වැසිකිළි පද්ධතිය ඉදි කිරීම	පළාත් නිශ්චිත	1,500.00	19,000.00	C 9 හෝ ඉහළ	2.42
7	M/C/25/55	මාර/පොල්වත්ත පුා.වි	පුධාන ශාලාව අලුත්වැඩියා කිරීමේ ඉතිරි වැඩ සම්පූර්ණ කිරීම	පළාත් නිශ්චිත	2,500.00	34,000.00	C 8 හෝ ඉහළ	4.48
8	M/C/25/56	මාර/මාකර ආදර්ශ පුා.වි	වැසි ජලය කළමනාකරණ පද්ධතිය නවීකරණය කිරීම	පළාත් නිශ්චිත	1,500.00	21,000.00	C 9 හෝ ඉහළ	2.69
9	M/C/25/57	මාර/කිරින්ද ආදර්ශ පුා.වි	70*25 දෙමහල් ගොඩනැගිල්ල නවීකරණය කිරීම	පළාත් නිශ්චිත	4,000.00	79,000.00	C 7 හෝ ඉහළ	10.43
60	M/C/25/58	මාර/තල්පාවිල ම.ම.වි	කීඩා පිටිය සංවර්ධනය කිරීම	පළාත් නිශ්චිත	2,500.00	42,000.00	C 8 හෝ ඉහළ	5.47

	G/CSL/25/06	/1						
61	M/C/25/59	මාර/කඹුරුගමුව ම.වි	80*20 තනි මහල් ගොඩනැගිල්ල 90*25 දෙමහල් ගොඩනැගිල්ලට නවීකරණය කිරීම (අදියර 01)	පළාත් නිශ්චිත සංවර්ධන පුදාන	4,000.00	88,000.00	C 7 හෝ ඉහළ	11.69
62	M/C/25/60	මාර/බෙලිදෙණිය ම.වි	60*20 ගොඩනැගිල්ලේ වහල අලුත්වැඩියා කිරීම	පළාත් නිශ්චිත	1,500.00	27,000.00	C 9 හෝ ඉහළ	3.57
63	H/C/25/26	හ/මහගල්වැව ක.වි	90*25 දෙමහල් ගොඩනැහිල්ලේ බිම් මහලේ කාර්යාල කාමරය සකස් කිරීම	නඩත්තු සැලැස්ම	1,500.00	21,000.00	C 9 හෝ ඉහළ	2.73
64	H/C/25/27	හ/දුටුගැමුණු ම.වි	90*25 තෙමහල් ගොඩනැහිල්ලේ වහලය අලුත්වැඩියාව	නඩත්තු සැලැස්ම	1,500.00	23,000.00	C 9 හෝ ඉහළ	3.05
65	H/C/25/28	හ/සපුතන්තීකන්ද පුා.වි	පැති බැම්ම හා ජල කුළුණ ඉදි කිරීම	පළාත් නිශ්චිත	1,500.00	20,500.00	C 9 හෝ ඉහළ	2.7
66	H/C/25/29	හ/මිද්දෙනිය ම.වි	රැඳවුම් තාප්පය ඉදිකිරීම (කිුිඩා පිටිය සඳහා ආරක්ෂක තාප්පය)	පළාත් නිශ්චිත	3,000.00	47,500.00	C 8 හෝ ඉහළ	6.27
67	H/C/25/30	හ/ගභේයාය ක.වි	80*20 ගොඩනැහිල්ල අලුත්වැඩියාව	පළාත් නිශ්චිත	1,500.00	27,000.00	C 9 හෝ ඉහළ	3.55
68	H/C/25/31	තංගල්ල කලාප අධාහපත කාර්යාලයේ	මායිම් තාප්පය ඉදිකිරීම(ඉතිරි වැඩ)	පළාත් නිශ්චිත	1,000.00	12,000.00	C 9 හෝ ඉහළ	1.49
69	H/C/25/32	හ/බෙලිඅත්ත ම.ම.වි	100*20 තාක්ෂණික විදාහාගාරය ගොඩතැහිල්ල නවීකරණය	පළාත් නිශ්චිත	3,500.00	67,500.00	C 8 හෝ ඉහළ	8.91
70	H/C/25/33	හ/කදිරගොඩ පුා.වි	වැසිකිළ අලුත්වැඩියාව	නඩත්තු සැලැස්ම	1,500.00	18,000.00	C 9 හෝ ඉහළ	2.28
71	H/C/25/34	හ/ගොඩවානගොඩ ක.වි	වැසිකිළි අලුත්වැඩියාව සහ මායිම් තාප්පය අලුත්වැඩියාව	නඩත්තු සැලැස්ම	1,500.00	21,000.00	C 9 හෝ ඉහළ	2.67
72	H/C/25/35	හ/කුඩාවැල්ල ක.වි	වැසිකිළි අලුත්වැඩියාව	නඩත්තු සැලැස්ම	1,000.00	14,000.00	C 9 හෝ ඉහළ	1.82
73	H/C/25/36	හ/රදනිආර ම.වි	පරිගණක විදාහගාරය අලුත්වැඩියා කිරීම	නඩත්තු සැලැස්ම	1,500.00	23,000.00	C 9 හෝ ඉහළ	2.94
74	H/C/25/37	හ/කිරම ධම්මානන්ද පුා.වි	80*20 ගොඩනැහිල්ල අලුත්වැඩියාව	නඩත්තු සැලැස්ම	2,500.00	37,000.00	C 8 හෝ ඉහළ	4.80
75	H/C/25/38	හ/කෑරදෙනිය ක.වි	40*20 ගොඩනැහිල්ල අලුත්වැඩියාව	නඩත්තු සැලැස්ම	1,500.00	28,000.00	C 9 හෝ ඉහළ	3.69

	G/CSL/25/06/	/1						
76	H/C/25/39	හ/අගලබඩ ක.වි	60*20 ගොඩනැහිල්ල අලුත්වැඩියා කිරීම	නඩත්තු සැලැස්ම	1,500.00	23,000.00	C 9 හෝ ඉහළ	2.97
77	H/C/25/40	හ/අල්අමීර් මුස්ලිම විදාහාලය	මායිම් තාප්පය අලුත්වැඩියාව	නඩත්තු සැලැස්ම	1,500.00	16,000.00	C 9 හෝ ඉහළ	2.08
78	H/C/25/41	හ/පල්ලෙජූලම්පිටි ය ම.වි	60*20 ගොඩනැහිල්ල අලුත්වැඩියා කිරීම	නඩත්තු සැලැස්ම	1,500.00	30,000.00	C 9 හෝ ඉහළ	3.93
79	H/C/25/42	හ/කැකිරිඕබඩ ක.වි	පුස්තකාල ගොඩනැහිල්ල අලුත්වැඩියාව	නඩත්තු සැලැස්ම	2,500.00	39,000.00	C 8 හෝ ඉහළ	5.1
80	H/C/25/43	හ/බෙරලිහෙල ම.වි	80*20 ගොඩනැහිල්ල සහ 50*25 කාර්යාල ගොඩනැහිල්ල වහල අලුත්වැඩියාව	නඩත්තු සැලැස්ම	1,500.00	21,000.00	C 9 හෝ ඉහළ	2.74
81	H/C/25/44	හ/ගැටමාන්න දකුණ ම.වි	100*20 ගොඩනැහිල්ලේ වහල අලුත්වැඩියාව	නඩත්තු සැලැස්ම	2,500.00	37,000.00	C 8 හෝ ඉහළ	4.87
82	H/C/25/45	හ/ගැටමාන්න උතුර ක.වි	100*20 ගොඩනැහිල්ලේ වහල අලුත්වැඩියාව	නඩත්තු සැලැස්ම	2,500.00	39,000.00	C 8 හෝ ඉහළ	5.07
83	H/C/25/46	හ/බූන්දල ක.වි	80*20 ගොඩනැහිල්ලේ වහල අලුත්වැඩියාව	නඩත්තු සැලැස්ම	2,500.00	32,000.00	C 8 හෝ ඉහළ	4.22
84	H/C/25/47	හ/පලපොත ම.වි	100*20 ගොඩනැහිල්ලේ වහල අලුත්වැඩියාව	නඩත්තු සැලැස්ම	1,500.00	27,000.00	C 9 හෝ ඉහළ	3.55
85	H/C/25/48	හ/බටඅත දකුණ ක.වි	40*20 ගොඩනැහිල්ල අලුත්වැඩියාව	නඩත්තු සැලැස්ම	1,500.00	19,000.00	C 9 හෝ ඉහළ	2.49
86	H/C/25/49	හ/කහවත්ත ම.වි	නෙප්වූන් ගොඩනැහිල්ල අලුත්වැඩියාව	නඩත්තු සැලැස්ම	3,000.00	61,000.00	C 8 හෝ ඉහළ	8.00
87	H/C/25/50	හ/කණුකැටිය ක.වි	80*20 ගොඩනැහිල්ල අලුත්වැඩියාව	නඩත්තු සැලැස්ම	1,500.00	24,000.00	C 9 හෝ ඉහළ	3.06
88	H/C/25/51	හ/දෙබරවැව ජනාධිපති විදාහාලය	120*20 ගොඩනැහිල්ලෙ වහල අලුත්වැඩියාව	නඩත්තු සැලැස්ම	2,500.00	40,000.00	C 8 හෝ ඉහළ	5.25
89	H/C/25/52	හ/දෙනිය පිංගම ක.වි	80*20 ගොඩනැහිල්ලේ වහල අලුත්වැඩියාව	නඩත්තු සැලැස්ම	1,500.00	19,000.00	C 9 හෝ ඉහළ	2.44
90	H/C/25/53	හ/මීගහවෙල ක.වි	120*20 ගොඩනැහිල්ලේ වහල සහ වැසිකිළි අලුත්වැඩියාව	පළාත් නිශ්චිත	1,500.00	17,000.00	C 9 හෝ ඉහළ	2.2
91	H/C/25/54	හ/මොරයාය ම.වි	120*20 ගොඩනැහිල්ල අලුත්වැඩියාව	පළාත් නිශ්චිත	3,000.00	60,000.00	C 8 හෝ ඉහළ	7.94

	G/CSL/25/06/	1						
92	H/C/25/55	හ/වෑකඳවල ජනපද ම.වි	120*20 ගොඩනැහිල්ල අලුත්වැඩියාව	පළාත් නිශ්චිත	3,500.00	63,000.00	C 8 හෝ ඉහළ	8.33
93	H/C/25/56	හ/හිභූරකන්ද ම.වි	72*16 ගොඩනැහිල්ල පුතිසංස්කරණය කිරීම	පළාත් නිශ්චිත	1,000.00	14,000.00	ී C 9 හෝ ඉහළ	1.81
94	H/C/25/57	හ/ලුණුගම්වෙහෙර ම.වි	වැසිකිළි පද්ධතිය ඉදිකිරීම	පළාත් නිශ්චිත	1,500.00	16,000.00	C 9 හෝ ඉහළ	2.00
95	H/C/25/58	හ/කටුවන පුා.වි	විදාහලයේ පැති පැම්ම ඉදි කිරීම	පළාත් නිශ්චිත සංවර්ධන පුදාන	2,500.00	35,000.00	C 8 හෝ ඉහළ	4.55
96	H/C/25/59	හ/රතනජෝති පුා.වි,ගහුලන්දෙනි ය	පැතිබැම්ම ඉදි කිරීම (කුීඩා පිටිය ඉදිරිපස)	පළාත් නිශ්චිත	2,500.00	40,000.00	C 8 හෝ ඉහළ	5.28
97	H/C/25/60	හ/වැවේගම ක.වි	60*20 ගොඩනැහිල්ල අලුත්වැඩියාව	නඩත්තු සැලැස්ම	1,500.00	24,000.00	C 9 හෝ ඉහළ	3.10
98	H/C/25/61	හ/පොළොම්මාරුව ආදර්ශ විදාහාලය	වැසිකිළි අලුත්වැඩියාව	නඩත්තු සැලැස්ම	1,500.00	17,000.00	C 9 හෝ ඉහළ	2.2
99	G/CSL/25/01	ගා/උනත්විටිය රේවත ම.වි.	පැති බැම්ම ඉදි කිරීම	ක්ලීන් ශී ලංකා	1,500.00	23,000.00	C 9 හෝ ඉහළ	2.8
10	G/CSL/25/02	ගා/ඇත්තිලිගොඩ සුදර්ශි ම.වී.	80 X 20 ගොඩනැගිල්ල නවීකරණය	ක්ලීන් ශුී ලංකා	1,000.00	16,000.00	C 9 හෝ ඉහළ	1.9
10	G/CSL/25/03	ගා/දෙල්ලව ම.වී.	පැති බැම්ම ඉදි කිරීම	ක්ලීන් ශී ලංකා	1,500.00	29,000.00	C 9 හෝ ඉහළ	3.6
10 2	M/CSL/25/01	මාර/දම්පැල්ල ම.වි.	සංගීත හා නැටුම් කාමර නවීකරණය	ක්ලීත් ශී ලංකා	1,000.00	9,000.00	C 9 හෝ ඉහළ	1.1
1 0 3	G/CSL/25/0 4	ගා/ රතනසිරි රාජකීය විදහාලය	ගැහැණු වැසිකිලි ඉදි කිරීම	ක්ලීන් ශී ලංකා	1,500.00	29,000.00	C 9 හෝ ඉහළ	3.7
1 0 4	G/CSL/25/0 5	ගා/ අනුරුද්ධ ක.වී.	වැසිකිලි තවීකරණය (පිරිමි වැසිකිලි 02 හා ගැහැණු වැසිකිලි 04)	ක්ලීත් ශී ලංකා	1,000.00	8,000.00	C 9 හෝ ඉහළ	1.0
1 0 5	G/CSL/25/0 6	ගා/සිරි අභයතිස්ස ම.වි.	ගුරුවරුන්ගේ සහ සිසුන්ගේ වැසිකිලි නවීකරණය	ක්ලීන් ශී ලංකා	1,500.00	22,000.00	C 9 හෝ ඉහළ	2.8
1 0 6	G/CSL/25/0 7	ගා/දික්කුඹුර පුා.වී.	වැසිකිලි පද්ධතියක් ඉදි කිරීම	ක්ලීන් ශී ලංකා	2,500.00	33,000.00	C 8 හෝ ඉහළ	4.2
1 0 7	G/CSL/25/0 8	ගා/හව්පේ ම.වි.	වැසිකිලි නවීකරණය	ක්ලීන් ශී ලංකා	1,000.00	7,000.00	C 9 හෝ ඉහළ	0.9

	G/CSL/25/06/	1						
1 0 8	G/CSL/25/0 9	ගා/හප්පිටිය ක.වි.	ගුරුවරුන්ගේ වැසිකිලි ඉදි කිරීම	ක්ලීන් ශී ලංකා	1,500.00	29,000.00	C 9 හෝ ඉහළ	3.7
1 0 9	G/CSL/25/1 0	ගා/බටපොල ම.ම.වී.	වැසිකිලි ඉදි කිරීම	ක්ලීන් ශී ලංකා	2,500.00	34,000.00	C 8 හෝ ඉහළ	4.3

02. ජාතික තරහකාරී ලංසු පටිපාටිය මත ලංසු ඉදිරිපත් කළ යුතුය. කොන්තුාත් පුදානයේදී සුදුසුකම් ලබන සාර්ථක ලංසුකරුවන් අසාධු ලේඛනගත නොවිය යුතු අතර ඉදිකිරීම් කර්මාන්ත සංවර්ධන අධිකාරියේ ඉහත කාණ්ඩ යටතේ ලියාපදිංචි වී සිටිය යුතුය.

03.ලංසු අයදුම්පත් 2025.06.18 දින සිට 2025.07.03 දින දක්වා පෙ.ව 9.00 සිට ප.ව 3.00 දක්වා ඉහත දක්වා ඇති පරිදි ආපසු නොගෙවන ගාස්තුව අධාාපන අමාතාංශයේ ගිණුම් අංශයේ සරප් වෙත මුදල් ගෙවීමෙන් අනතුරුව ලබාදෙන මුදල් කුවිතාන්සිය ඉදිරිපත් කර හෝ ආපසු නොගෙවන ගාස්තුව අධාාපන අමාතාංශ ලේකම් නමින් ගාල්ල කොටුව ලංකා බැංකුවේ ඇති ගිණුම් අංක 1587423 ට බැර කර රිසිට් පත සමග ඔබගේ ඉල්ලීම් ලිපිය ද.ප. අධාාපන අමාතාංශයේ 070 7130700 දරණ වටස්අප් අංකයට පමණක් හෝ acc.moesp@gmail.com ඊ මෙල් ලිපිනයට පමණක් යොමු කිරීමෙන් ඔබට අවශා ලංසු පතිකා තැපැල් මගින් හෝ කුරියර් කර හෝ ඊමේල් මගින් හෝ වටස්අප් මගින් ගෙන්වා ගැනීමට හෝ ලබුදුව,දක්ෂිණපාය අධාාපන අමාතාාංශයෙන් (බිම් මහල) ගිණුම් අංශයෙන් ලබා ගත හැකිය. වැඩි විස්තර අමාතාාංශයේ 091-2030700 දුරකථන අංකයට වැඩ කරන දින ඇමතීමෙන් හෝ ද.ප. අධාාපන අමාතාාංශ වෙබ් අඩවියට www.edumin.sp.gov.lk

04. මුදා තබන ලද ලංසු පතිකා 2025.07.04 පෙ.ව 11.00 ට පෙර ලැබෙන සේ ලේකම්, දකුණු පළාත් අධාාපන අමාතාාංශය, දක්ෂිණපාය, ලබුදුව, ගාල්ල යන ලිපිනයට ලියාපදිංචි තැපෑලෙන් එවීමට හෝ අතින් රැගෙන විත් පුධාන ගණකාධිකාරී නිල කාමරයේ තබා ඇති ටෙන්ඩර් පෙට්ටියට බහාලිය හැකිය. පුමාද වී ලැබෙන ලංසු පුතික්ෂේප කරනු ලැබේ.

05.ලංසු විවෘත කිරීම 2025.07.04 දින පෙ.ව 11.00 ට ලංසු පතිකා භාරගෙන අවසන් වූ වහාම දකුණු පළාත් අධාාපන අමාතාාංශයේ පුසම්පාදන කමිටු සභාපතිගේ පුධානත්වයෙන් අමාතාාංශයේදී සිදු කරන අතර එම අවස්ථාවට ලංසුකරුට හෝ ලංසුකරුගේ බලයලත් නියෝජිතයන් හට සහභාගී විය හැක.

06. ලංසුව සමහ ඉදිරිපත් කරන ලංසු සුරක්ෂණය ශී ලංකා වාණීජ බැංකුවකින් දකුණු පළාත් අධාාපන අමාතාාංශයේ ලේකම් නමට ලබා ගත් 2025.07.04 දින සිට 2025.10.04 දක්වා වලංගු ලංසු ඇපකරයක් හෝ අධාාපන අමාතාාංශයේ ගිණුම් අංශය වෙත මුදල් ගෙවීමෙන් අනතුරුව ලබාදෙන මුදල් කුවිතාන්සියේ පිටපත ලංසු පතිකාව සමහ ඉදිරිපත් කළ යුතුය.

07. ලංසු වලංගු කාලය දින 77 කි.


08. ඉදිරිපත් කරනු ලබන කර්මාන්තයට අදාල ලංසු පිටපත් දෙකකින් යුතුව ඉදිරිපත් කළයුතු අතර එහි මුල් පිටපතහී " මුල් පිටපත" යනුවෙන් සදහන් කළ යුතු අතර අනු පිටපතෙහී " අනුපිටපත" යනුවෙන් සදහන් කළ යුතුය. ලංසුපත් වල මුල් පිටපත හා අනුපිටපත වෙන වෙනම කවරවල බහා මුදා තබා එම කවර දෙක එක් කවරයක බහා එම කවරය මුදා තබා කවරයේ වම් පස උඩකෙළවරේ කර්මාන්තයේ නම සහ අංකය සදහන් කළ යුතුය.

- 09. ඔබ විසින් ඉදිරිපත් කිරීමට නියමිත සෑම ලංසු පතිකාවෙහිම මිල ගණන් සදහන් කර ඇති පිටු අංකයන්හි ඔබ විසින් සදහන් කළ යුතු ඒකක මිල ගණන් හා මුළු මුදල දැක්වෙන තීරය සහ සාරාංශයද (වට්ටම් දැක්වෙන තීරයද ඇතුලත්ව) විනිවිද පෙනෙන සේ සෙලෝටේප් කර ලංසු ඉදිරිපත් කිරීම අනිවාර්ය වේ.
- 10. ද.ප. අධාාපන අමාතාංශය දැනටමත් දකුණු පළාතේ පාසල්වල ඉදිකිරීම අලුත්වැඩියා හා නඩත්තු කටයුතුවලට අදාල වාාපෘති සියයක පමණ පුසම්පාදන කටයුතු අවසන් කර ඉදිකිරීම් කටයුතු ආරම්භ කර ඇත.එමෙන්ම මෙම වාාපෘති එකසිය නමයෙහි ද පුසම්පාදන කටයුතු හැකි ඉක්මනින් අවසන් කර වාපෘතිවල වැඩ 2025 වසරේ දෙසැම්බර් මස වනවිට අවසන් කල යුතු බැවින් ලංසුකරුවන්ගේ ධාරිතාවය පිළිබඳ ලංසු පුදානයේදී සලකා බලනු ලැබේ.

11.අඩුපාඩු සහිත ලංසුපතිකා පුතික්ෂේප කරනු ලබන ලැබේ. මෙම පුසම්පාදනය සම්බන්ධයෙන් පුසම්පාදන කමිටුවේ තීරණය අවසාන තීරණය බව සැලකිය යුතුය.

ඒ.යූ.වේලාරත්න, පුසම්පාදන කමිටු සභාපති, දකුණු පළාත් අධාාපන අමාතායංශය, පළමු මහල, දක්ෂිණපාය, ලබුදූව, ගාල්ල. 2025.06.18

දුරකථන අංකය - 0912030700 ඊමේල් - acc.moesp@gmail.com

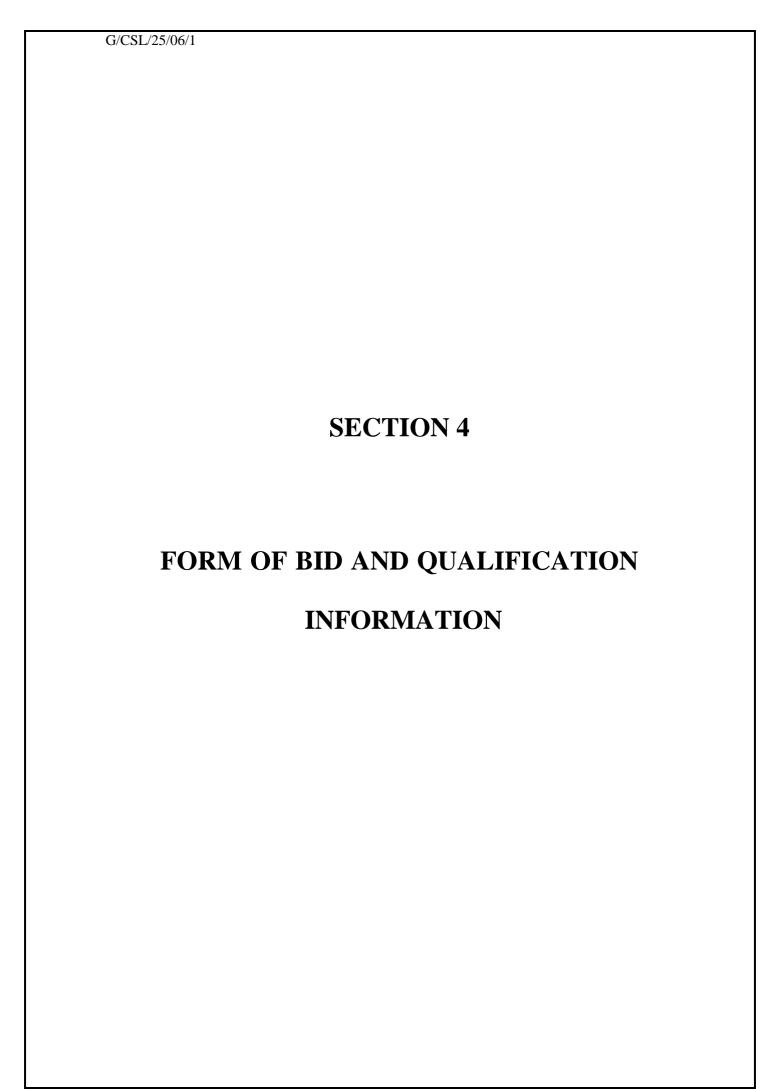

FORM OF BID

	me of ntract	: Renovation of Teachers' and Students' Toilets at G/Siri Abeythissa M.V.
То		: Secratory Ministry of Education, Southern Province
Gei	ntleman,	
1,	[ICTAD/ SB Quantities ar execute and	nined the Standard Bidding Document - Procurement of Works - Minor Contracts D/03 - Second Edition, January 2007], Schedule, Specifications, Drawings and Bills of addenda for the execution of the above named Works, we/I the undersigned, offer to complete such Works and remedy any defect therein in conformity with the aforesaid f Contract, Schedule, Specifications, Drawings, Bill of Quantities and Addenda for the sum of Sri Lankan Rupees
	(LKR accordance w) or such other sums as may be ascertained in with the said Conditions.
2,	We/I acknow	ledge that the Schedule forms part of our/my Bid.
3,		ke, if our Bid is accepted, to commence the Works as stipulated in the Schedule, and to whole of the Works comprised in the Contract within the time stated in the Schedule.
4,	or any extend	o abide by this bid for the period stated in the Sub-Clause 15 of Instructions to Bidders ded period and it shall remain binding upon us and may be accepted at any time before n of that period.
5,		ntil a formal agreement is prepared and executed this Bid, together with your written nereof, shall constitute a binding contract between us/me.
6,	We/I underst	and that you are not bound to accept the lowest or any Bid you may receive.
		day of
		(IN BLOCK CAPITALS)
	Signature	:
	Name	ː
	Designation	:
	Address	:
	Witness	:

QUALIFICATION INFORMATION

(to be completed by the bidder and submitted with the Bid)

	Eligibility Requirement	Bidder'	s Qualification
Registration number			
Grade	CIDA C9 or above		
Specialty	Buildings		
Expiry Date			
Backlisted Contractors Have you been declared as a defaother Agency? IF yes provide details	nulted contractor by NPA or an	у	
VAT Registration Number			
Construction Program	(attach as annex)		
Construction Program	(attach as annex) Public company/Private Com	pany/Partnersh	nip/Sole proprietor
	Public company/Private Com	pany/Partnersh	nip/Sole proprietor Bidder's Qualification
Construction Program Legal status	Public company/Private Com	pany/Partnersh Required No	Bidder's Qualification Proposed by bidder (Name, experience and
Construction Program Legal status Qualification and experience of	Public company/Private Com Full Eligibility Requirement Category, Experience and	Required	Bidder's Qualification Proposed by bidder
Construction Program Legal status Qualification and experience of	Public company/Private Com Figure 1: Figure 2: Public company/Private Com Figure 2: Public company/Private Com Category, Experience and Qualifications	Required No	Bidder's Qualification Proposed by bidder (Name, experience and
Construction Program Legal status Qualification and experience of	Public company/Private Com Figure Eligibility Requirement Category, Experience and Qualifications 1 Site Supervisors	Required No	Bidder's Qualification Proposed by bidder (Name, experience and
Construction Program Legal status Qualification and experience of	Public company/Private Com Figure 1 Figure 2 Figure 2 Figure 2 Figure 2 Figure 3 Figure 3 Figure 3 Figure 3 Figure 4 Figure 4	Required No	Bidder's Qualification Proposed by bidder (Name, experience and

G/CSL/25/06/1		
S, COL, 20, 00/ 1		
	SECTION 5	
	SECTION 5	
	SCHEDULE	
	SCHEDULE	

SCHEDULE

ITB Clause	Conditions o Clause	f Contract	Item Data
1	1.1.8	Employer is	Name : Secratory
			Address : Ministry of Education, Southern Province
			"Dakshinapaya",Labuduwa,Galle
	1.1.10	Engineer is	Name : District Engineer (Buildings)
			Address : District Engineer (Buildings) Office
			Pettigalawaththa, Galle
1 & 13	1.1.21	Summary of Works	The Works consists of Located at : <i>Balapitiya</i>
		Horks	Contract : Renovation of Teachers' and Name Students' Toilets at G/Siri Abeythissa M.V.
			Contract : <i>G/CSL/25/06</i> Number
1	1.1.14	Intended Completion Date	Intended Completion Date is 80 Days from the Start Date
2		Source of Funds	The source of funds is Clean Sri Lanka
3		Eligibility	The requirement is CIDA C9 or above Buildings
12		Documents of the Bid	Any other information
13	10.10	Price Adjustment	The Contract is not subject to price adjustment in accordance with Sub-Clause 10.10 of the Conditions of Contract.
			The price adjustment shall be computed in accordance with Option B under sub clause 10.10.
			Non adjustable element shall be: BOQ Item Numbers :
			Option B: Type of Construction: Non residential buildings

(G/	CS1	[/	25	//	16	/1

ITB Clause	Conditions of Clause	of Contract	Item	Data
16		Bid Security	Bid shall include a Bid Security:	
			 for an amount LKR by an agency acceptable to Employ for bid security (unconditional guin Section 9, Standard Forms, remain valid till 04.10.2025 OR Bid Security amount can be paid by Employer 	arantee) included
31	4.4	Performance Security	Amount of Performance Security requirements the Initial Contract Price	ired is 5% of
			The form acceptable is unconditional g standard form as per SBD/03	guarantee as
	6.4	Late Completion	The amount to be paid is 0.05 % of Price per Day, subjected to maximum Contract Price.	
	8.1	Notification of Defects	The period for Defect Notification from Taking Over.	n is 90 Days
	10.3	Retention	The amount of retention is 10 % of cerdone. The maximum amount of retention is 5 Contract Price.	
	10.12	Advance Payment	Upon the payment of the advance pa Employer shall return the original payment guarantee to the Contractor.	of the advance
	13.1 (c)	Insurance, third party	Minimum amount for third party in 100,000.00	nsurance is LKR
	13.1 (a)	Insurance for Works, Material and plant	The minimum cover for insurance of t plant and materials is 110% of initial of	
	13.1	Insurance for Contractor's Personnel	Minimum amount for Insurance is LKI	R 500,000.00
33	1.1.11	Adjudicator	CIDA	
	14.0	Resolution of Disputes	Deputy Chief Secretary (Engineerin Southern Province	g Services),
			Fees and types of reimbursable experting the Adjudicator shall be on a case shall be shared by the Contractor and	to case basis and

G/CSL/25/06/1		
G/ 652/25/ 66/ 1		
	SECTION 6	
	SECTION 0	
	SPECIFICATIONS	
	SPECIFICATIONS	

TECHNICAL SPECIFICATIONS

Technical specification that are applicable to this project are listed below:

• SCA/3/1 - Irrigation and Land Drainage

• SCA/3/2 - Water Supply Sewerage and Storm Water Drainage

• SCA/3/3 - Reclamation Works

• SCA/3/4 - Ground Water Exploration & Exploitation

SCA/4/I
 Building Works (Vol I)
 SCA/4/II
 Building Works (Vol II)

• SCA/5 - Roads and Bridges

SCA/6 - Coastal Harbour Engineering Works
 SCA/8 - Electrical and Mechanical Works


• ICTAD/DEV/16 - Board & Cast In situ Reinforced Concrete Piles

• ICTAD/DEV/17 - Site Investigation for Building Works & Sample Bill of

Quantities

Above publications shall be purchase from the Construction Industry Development Authority (CIDA), Savusiripaya, 123. Wijerama Mawatha, Colombo 07.

[•] Any other specification approved by the Government.

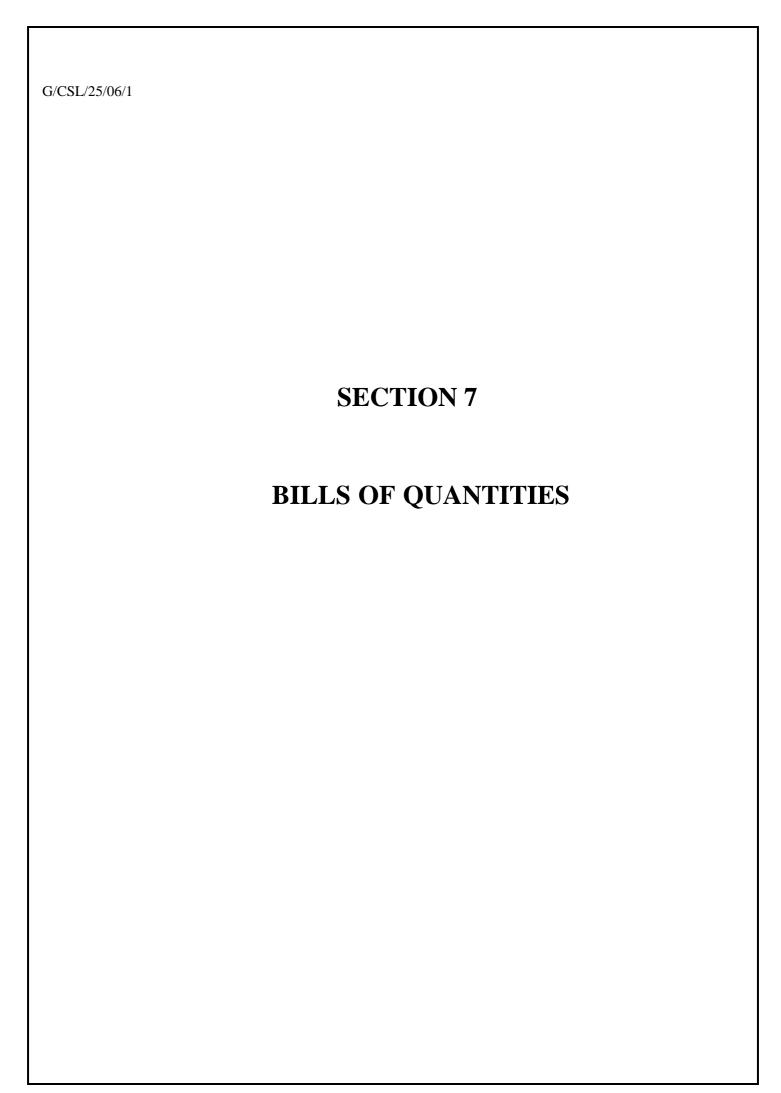

RENOVATION OF TEACHERS' AND STUDENTS' TOILETS AT G/SIRI ABEYTHISSA M.V.

ID	Description	Unit	Qty.	Rate	Amount
	Toilet Block -	01			
	<u>Demolisher</u>				
1	Removing tiles & reapers from the roof & stacking serviceable material clearing debris away.	sq.m	68.00		
2	Removing and stacking Valance, Barge board materials and clearing debris away from site in single storied building	m	33.00		
3	Removing and stacking Timber Window frame with sash, from existing walls	sq.m	4.00		
4	Removing and stacking iron Door with frame from exsisting wall & finish the wall in good condition	sq.m	5.00		
	Total carried to summary				
	<u>Pavior</u>				
5	300 x 600 mm Ceramic floor tiles(colour) with all specials supplying and fixing to floors including raking plaster and bedding in 1:3 cement mortar & pointed with tile grout.(Use Rocell tiles Prime cost Rs. 900)as per the engineer's instruction.	sq.m	1.00		
	Total carried to summary				
	<u>Electrical</u>				
6	Supply and fixing 01 No. Pendent type lamp(9 W LED Bulb - efficacy:85 lumen/W or above with two years warenty) with GANG switch Complete with necessary concealed conduit wiring as per working order.(Switch - ACL/Chint/Krypton/Orange) (Cable - ACL/Kelani/Orange/Sierra) (fittings - krypton/Polycrome/Orange) (Conduit - krypton/Polycrome) (Bulb - Orange electric ECO LITE/ ZENOI/ Kelani)) [Cable SLS 733, Switch SLS 1000 Bulb SLS 984]	nr	8.00		
7	Supplying and fixing (7/0.67)(Cu/PVC/PVC) (Twin) P.V.C (Cu) Sub Main Wire (2.5 mm2) [(Cable - ACL/Kelani/Orange/Sierra) Cable SLS 733]	m	10.00		
8	Supplying and fixing 1 Nr. 1 pole MCB (6 A/ 10A/ 16A/ 20A/ 32A) (Make -Orange electric 10kA/ Schneider/Chint NB7/EB) Original Makes with company warenty Certificate. all complete as per instruction	nr	2.00		
9	Supplying and fixing Ceramic pulley with "D" bracket for Electricity connection. all complete as per instruction	nr	2.00		
	Total carried to summary				

ID	Description	Unit	Qty.	Rate	Amount
	Roofer				
10	$50\mathrm{x}50\mathrm{mm}$ Beares Imported timber supplied & fixed new with iron nails	m	76.00		
11	Corrugated asbestos sheets supplied and fixed to roof or wall on existing framework with necessary roofing screws and limpet washers or hook bolts.	sq.m	68.00		
12	Ridging, Calicut pattern, bedded in cement and lime mortar 1:1:4, colour to match tiles. (Keep went opening every vally point).	m	4.50		
13	Ridging, Calicut pattern bedded in cement and lime mortar 1:1:4, colour to match tiles, Rate to include, keep went opening every vally point.(Tiles available at site) Single storied building.	m	5.00		
	Total carried to summary				
	Carpenter & Joiner				
14	8"x3/4" (200x20mm) Boards , barge , valance, fascia, 3/4" (20mm) thick in class II local (Ginisapu) timber prepared by using multi purpose wood working machine , fixed complete with necessary 2" brass screws.applying one coat of wood presavative, one coat of aluminium primer & two coats of enamal paint	m	19.00		
15	10" x 3/4 " Boards , barge , valance, fascia, 3/4" thick in class II local (Ginisapu) timber prepared by using multi purpose wood working machine, fixed complete with necessary 2" Brass screws applying one coat of wood presavative, one coat of aluminium primer & two coats of enamal paint	m	14.00		
	Total carried to summary				
	Iron Monger				
16	Iron door with 12 mm dia. M.S. bar - Fabricating & fixing Iron door ,Door Frame with 32 x 32 x 5 mm angle Iron(Heavy quality) frame and Sash with 25 x 25 x 1.2 mm thick G.I. box bar, outer frame with one nr. horizontal middle bar. 12mm dia M.S Rods passing through the drilled 25x6mm Flat iron middle bar welded to upper part of the sash frame at 100 mm c/c vertically. 12 x 6 mm thick flat iron welded around the lower part of the door sash and 2 nr. intermediate 20 x 6 mm flat Iron weded horizontally. should be .47mm thk Zn Al sheet fixed to flate iron frame with pop riverts.Door sash fixed to frame with 03 nr.s of 100 x 75 mm steel hinges. Applying one coats of metal primer (red clour) and two coats of enamel paint Black or different colour.(3'-0" x 7'-0" size) including	sq.m	5.00		

ID	Description	Unit	Qty.	Rate	Amount
17	Supplying, and fabricating 12mm M.S rod grill, consisting 25 x 6 mm flat iron outer frame, and weld 1 nr 25 x 6 mm flat iron horizontally weld to equel length of outer frame.12mm M.S rods, passing through the drilled middle flat iron at 100mm c/c weld vertically to outer frame . Applying one coat of metal primer and two coats of enamel paint(different colour). Frame fixing to opening , using 1 1/2" iron screws and rawl plugs as per the given Draw.No. SPES/Rate23/Ir-24. (0.60 x 1.20m)	sq.m	4.00		
	Total carried to summary				
	Painter & Decorator				
18	Prepare and & applying two coats of Wood preservative, (clear) to timber including touching up cut ends (New work)	sq.m	16.00		
19	Wethershield paint to external faces of wall 02coat apply using roller brush 2" brush (ground Floor)	sq.m	37.00		
20	Wethershield paint to external faces of wall 02coat apply using roller brush 2" brush (ground Floor)	sq.m	72.00		
21	Painting plinth and skirting with floor paint, 1 coat including preparing surface	sq.m	7.00		
	Total carried to summary				
	Plumber				
22	Suppling and fixing Pedestal type wash basin (rocell-Efi), rate to include waste coupling, "Desigle" or approved type Pillar tap & 1/2" chromium plated angle valve, 450mm flexible hose (spain) including nails	nr	1.00		
23	Supplying and fixing barth room set with seat cover" Rocell Efi" Including all necessary accessories, wash basin (pedestal) with basin waste coupling & tap "Desigle", low level closet, with cistern, complete to working order Rate to include 450 mm long flexible hose "Spain", 1/2" chromium plate "Desigle" angle valves & Bidet shower chromium plate "Desigle"	nr	2.00		
24	Suppling and fixing Cromium plated Pillar tap 1/2" "Desigal" or approved type	nr	3.00		
25	Mirror, bevelled, bath room type, square shape ("Desigle or equivalent") suppling and Fixing to wall with Rawl plugs (18"x24")	nr	4.00		
26	Flushing cistern high level fixing complete (cistern & brackets available) with 1 1/2" brass screws	nr	2.00		
27	Supplying and fixing round bottle trap 1 1/4" (Desigle or equivalent) to existing urinal pr. wash basing	Nr	4.00		
28	Supplying & fixing urinal flush valve (cx2001) (Rocell or equivalent) to existing urinal	Nr	2.00		

ID	Description	Unit	Qty.	Rate	Amount			
29	Supply & fixing sub zero wash basin (Rocell) white on work table with (A186) round bottle trap (1 1/4") (Rocell), pillar basin tap (Rocell), wash basin coupling waste outlet without overflow - brass (1 1/4). Rate to include angle valve, 450mm long flexible horse spain. (Rocell / Desigle or equivalant)	Nr	2.00					
	Total carried to summary							
	Alluminium							
30	Supplying, fabricating and fixing Aluminium natural anodized casement Fanlight with frame (1 Nrs fanlight sash and 1 Nrs louver at the top) as per Drg. No. SPES/RATE23/FL/L/01. Overall size of the fanlight frame is 600x1050mm. (Size may be changed according to the site) Fanlight frame consisting top, bottom, side bars (41x31mm) and horizontal middle bar (46x41mm), and fixing using 38x38x2.5mm Al angle bracket with 1/8x3/8" Al rivets. Frame should be fixed to wall with 10 Nrs of No 6 rowl plugs and 8x2" ST screws. Louver blades (52x34mm) should be fixed to louver frame bars (20x37mm) using 1/8x1/2" Al rivets, and louver panel fixed to frame using 1/8x1/2" Al rivets. Fanlight sash consisting top, bottom and side bars (40x35mm) should be fixed using 8x1 1/2" ST screws, and 5mm thick clear glass. Rate should be included for supplying and fixing required 437K Rubber beading, 674U Rubber beading, 2 Nrs of 14" SS 304 bar hinges using 5/32x3/8" Al rivets, 1 Nrs of heavy quality Al fasteners using 5/32x3/8" Al rivets, Screws, Pop rivets, Silicone etc.	sq.m	4.00					
31	Supplying, fabricating and fixing Aluminium natural anodized fully composite board (Al/PVC Composite board) door with frame (1 Nr door sash) as per Drg. No. SPES/RATE23/D/04. Overall size of the door frame is 750x1950mm. (Size may be changed according to the site) Door frame consisting top and side bars (50x25x0.9mm box bars) with 18x11mm door stopper bar using 5/32x3/8" Al rivets and fixing with 38x38x2.5mm Al bracket using 1/8x3/8" Al rivets. Frame should be fixed to wall with 8 Nrs of No 6 rowl plugs and 8x3" ST screws. Door sash consisting top, sides, bottom and 2 Nrs of middle bars (50x25x0.9mm box bars). Sash frame should be fixed with 38x38x2.5mm Al bracket using 1/8x3/8" Al rivets, 3mm thick Al/PVC double side composite board for full door should be fixed using 1/8x3/8" Al rivets. Rate should be included for supplying and fixing required Mohair beading, 3 Nrs of 100x75mm Aluminium hinges using 5/32x3/8" Al rivets, 2 Nrs of Aluminium plate door handle, 2 Nrs of 2" Al Barrel Bolt, Screws, Pop rivets, Silicone etc.	sq.m	7.00					
	Total carried to summary							
	Toilet Block - 02							

ID	Description	Unit	Qty.	Rate	Amount
	<u>Demolisher</u>				
32	Removing tiles & reapers from the roof & stacking serviceable material clearing debris away.	sq.m	37.00		
33	Removing and stacking Valance, Barge board materials and clearing debris away from site in single storied building	m	24.50		
34	Removing and stacking Timber Window frame with sash, from existing walls	sq.m	2.00		
	Total carried to summary				
	Earth Work				
35	Earth cutting and levelling site by manually in any material except rock requiring blasting, including transporting within 1/4 mile, depositing and levelling	cu.m	6.00		
	Total carried to summary				
	Electrical				
36	Supplying and fixing Ceramic pulley with "D" bracket for Electricity connection. all complete as per instruction	nr	2.00		
37	Supply and fixing 01 No. Pendent type lamp(9 W LED Bulb - efficacy:85 lumen/W or above with two years warenty) with GANG switch Complete with necessary concealed conduit wiring as per working order.(Switch - ACL/Chint/Krypton/Orange) (Cable - ACL/Kelani/Orange/Sierra) (fittings - krypton/Polycrome/Orange) (Conduit - krypton/Polycrome) (Bulb - Orange electric ECO LITE/ ZENOI/ Kelani)) [Cable SLS 733, Switch SLS 1000 Bulb SLS 984]	nr	4.00		
38	Supplying and fixing (7/0.67)(Cu/PVC/PVC) (Twin) P.V.C (Cu) Sub Main Wire (2.5 mm2) [(Cable - ACL/Kelani/Orange/Sierra) Cable SLS 733]	m	10.00		
39	Supplying and fixing 1 Nr. 1 pole MCB (6 A/ 10A/ 16A/ 20A/ 32A) (Make -Orange electric 10kA/ Schneider/Chint NB7/EB) Original Makes with company warenty Certificate. all complete as per instruction	nr	1.00		
	Total carried to summary				
	<u>Roofer</u>				
40	50 x 50 mm Beares Imported timber supplied & fixed new with	m	42.00		

ID	Description	Unit	Qty.	Rate	Amount
41	Corrugated asbestos sheets supplied and fixed to roof or wall on existing framework with necessary roofing screws and limpet washers or hook bolts.	sq.m	37.00		
	Total carried to summary				
	Carpenter & Joiner				
42	8"x3/4" (200x20mm) Boards , barge , valance, fascia, 3/4" (20mm) thick in class II local (Ginisapu) timber prepared by using multi purpose wood working machine , fixed complete with necessary 2" brass screws.applying one coat of wood presavative, one coat of aluminium primer & two coats of enamal paint	m	10.40		
43	10" x 3/4 " Boards , barge , valance, fascia, 3/4" thick in class II local (Ginisapu) timber prepared by using multi purpose wood working machine, fixed complete with necessary 2" Brass screws applying one coat of wood presavative, one coat of aluminium primer & two coats of enamal paint	m	14.00		
	Total carried to summary				
	Iron Monger				
44	Supplying,and fabricating 12mm M.S rod grill, consisting 25 x 6 mm flat iron outer frame, and weld 1 nr 25 x 6 mm flat iron horizontally weld to equel length of outer frame.12mm M.S rods, passing through the drilled middle flat iron at 100mm c/c weld vertically to outer frame . Applying one coat of metal primer and two coats of enamel paint(different colour). Frame fixing to opening , using 1 1/2" iron screws and rawl plugs as per the given Draw.No. SPES/Rate23/Ir-24. (0.60 x 1.20m)	sq.m	2.00		
45	Iron door with 12 mm dia. M.S. bar - Fabricating & fixing Iron door ,Door Frame with 32 x 32 x 5 mm angle Iron(Heavy quality) frame and Sash with 25 x 25 x 1.2 mm thick G.I. box bar, outer frame with one nr. horizontal middle bar. 12mm dia M.S Rods passing through the drilled 25x6mm Flat iron middle bar welded to upper part of the sash frame at 100 mm c/c vertically. 12 x 6 mm thick flat iron welded around the lower part of the door sash and 2 nr. intermediate 20 x 6 mm flat Iron weded horizontally. should be .47mm thk Zn Al sheet fixed to flate iron frame with pop riverts.Door sash fixed to frame with 03 nr.s of 100 x 75 mm steel hinges. Applying one coats of metal primer (red clour) and two coats of enamel paint Black or different colour.(3'-0" x 7'-0" size) including Hasp & staple6" with approved quality Brass 2" padlock.	sq.m	2.20		
	Total carried to summary				
	Painter & Decorator	•			

ID	Description	Unit	Qty.	Rate	Amount
46	Prepare and & applying two coats of Wood preservative, (clear) to timber including touching up cut ends (New work)	sq.m	5.00		
47	Wethershield paint to external faces of wall 02coat apply using roller brush 2" brush (ground Floor)	sq.m	24.00		
48	Wethershield paint to external faces of wall 02coat apply using roller brush 2" brush (ground Floor)	sq.m	44.00		
49	Painting plinth and skirting with floor paint, 1 coat including preparing surface	sq.m	4.00		
	Total carried to summary				
	Plumber				
50	Suppling and fixing Cromium plated Pillar tap 1/2" "Desigal" or approved type	nr	2.00		
51	Supplying and fixing, Closet, pedestal type, with low level glazed earthenware flushing cistern, plastic seat cover(Rocell - "Efi") rate to include approved branded 1/2" chromium plate angle valve, 450mm flexible hose (spain),etc. ("Desigle"/rocell/huida)	nr	2.00		
52	Basin, sink commode or urinal including all fittings, removing from walls as per instruction.	nr	2.00		
53	Mirror, bevelled, bath room type, square shape ("Desigle or equivalent") suppling and Fixing to wall with Rawl plugs (18"x24")	nr	2.00		
	Total carried to summary				
	Alluminium				
54	Supplying, fabricating and fixing Aluminium natural anodized casement Fanlight with frame (1 Nrs fanlight sash and 1 Nrs louver at the top) as per Drg. No. SPES/RATE23/FL/L/01. Overall size of the fanlight frame is 600x1050mm. (Size may be changed according to the site) Fanlight frame consisting top, bottom, side bars (41x31mm) and horizontal middle bar (46x41mm), and fixing using 38x38x2.5mm Al angle bracket with 1/8x3/8" Al rivets. Frame should be fixed to wall with 10 Nrs of No 6 rowl plugs and 8x2" ST screws. Louver blades (52x34mm) should be fixed to louver frame bars (20x37mm) using 1/8x1/2" Al rivets, and louver panel fixed to frame using 1/8x1/2" Al rivets. Fanlight sash consisting top, bottom and side bars (40x35mm) should be fixed using 8x1 1/2" ST screws, and 5mm thick clear glass. Rate should be included for supplying and fixing required 437K Rubber beading, 674U Rubber beading, 2 Nrs of 14" SS 304 bar hinges using 5/32x3/8" Al rivets, 1 Nrs of heavy quality Al fasteners using 5/32x3/8" Al rivets, Screws, Pop rivets, Silicone etc.	sq.m	2.00		

	G/CSL/25/06/1				
ID	Description	Unit	Qty.	Rate	Amount
55	Supplying, fabricating and fixing Aluminium natural anodized	sq.m	6.00		
	fully composite board (AI/PVC Composite board) door with				
	frame (1 Nr door sash) as per Drg. No. SPES/RATE23/D/04.				
	Overall size of the door frame is 750x1950mm. (Size may be				
	changed according to the site) Door frame consisting top and				
	side bars (50x25x0.9mm box bars) with 18x11mm door stopper				
	bar using 5/32x3/8" Al rivets and fixing with 38x38x2.5mm Al				
	bracket using 1/8x3/8" Al rivets. Frame should be fixed to wall				
	with 8 Nrs of No 6 rowl plugs and 8x3" ST screws. Door sash				
	consisting top, sides, bottom and 2 Nrs of middle bars				
	(50x25x0.9mm box bars). Sash frame should be fixed with				
	38x38x2.5mm Al bracket using 1/8x3/8" Al rivets, 3mm thick				
	AI/PVC double side composite board for full door should be				
	fixed using 1/8x3/8" Al rivets. Rate should be included for				
	supplying and fixing required Mohair beading, 3 Nrs of				
	100x75mm Aluminium hinges using 5/32x3/8" Al rivets, 2 Nrs				
	of Aluminium plate door handle, 2 Nrs of 2" Al Barrel Bolt,				
	Screws, Pop rivets, Silicone etc.				
	Total carried to summary				
	I				_

	(No Topic Assigned)						
	General Works						
56	Clearing site and grubbing up all small trees not exceeding 500mm girth and including bushes, scrubs, undergrowth hedges etc.	sq.m	60.00				
	Total carried to summary						


RENOVATION OF TEACHERS' AND STUDENTS' TOILETS AT G/SIRI ABEYTHISSA M.V.

Rate Schedule	Amount
Toilet Block - 01	
Demolisher	
Pavior	
Electrical	
Roofer	
Carpenter & Joiner	
Iron Monger	
Painter & Decorator	
Plumber	
Alluminium	
Toilet Block - 02	
Demolisher	
Earth Work	
Electrical	
Roofer	
Carpenter & Joiner	
Iron Monger	
Painter & Decorator	
Plumber	
Alluminium	
(No Topic Assigned)	
General Works	
Total	
=	
Total :	
Less PS:	
Discounts (%):	
DISCOUTICS (
(+) PS:	
Contract Amount:	

Renovation of Teachers' and Students' Toilets at G/Siri Abeythissa M.V.

(A) BOQ Tot	tal	= LKR	
(B) Less for	Provisional Sums	= LKR	-
(C) Sub Tota	ıl (A-B)	= LKR	_
(D) Less for	Discount (If Any) (%)	= LKR	
(E) Sub Tota	ıl (C-D)	= LKR	
(F) Add for l	Provisional Sums	= LKR	<u> </u>
Total Bi	d Amount (E+F)	= LKR	
(Excludin	g VAT, Carried to Form of Bid)		
Total Bid Amo	unt in Words		
VAT	18%		
Grand T	Cotal		
converted to a perce	ted to provide discounts, if any entage. Your discount will also b		
Signature of Bidder			

G/CSL/25/06/1		
	SECTION 8	
	,	
	DRAWINGS	
	DIMINITIOD	

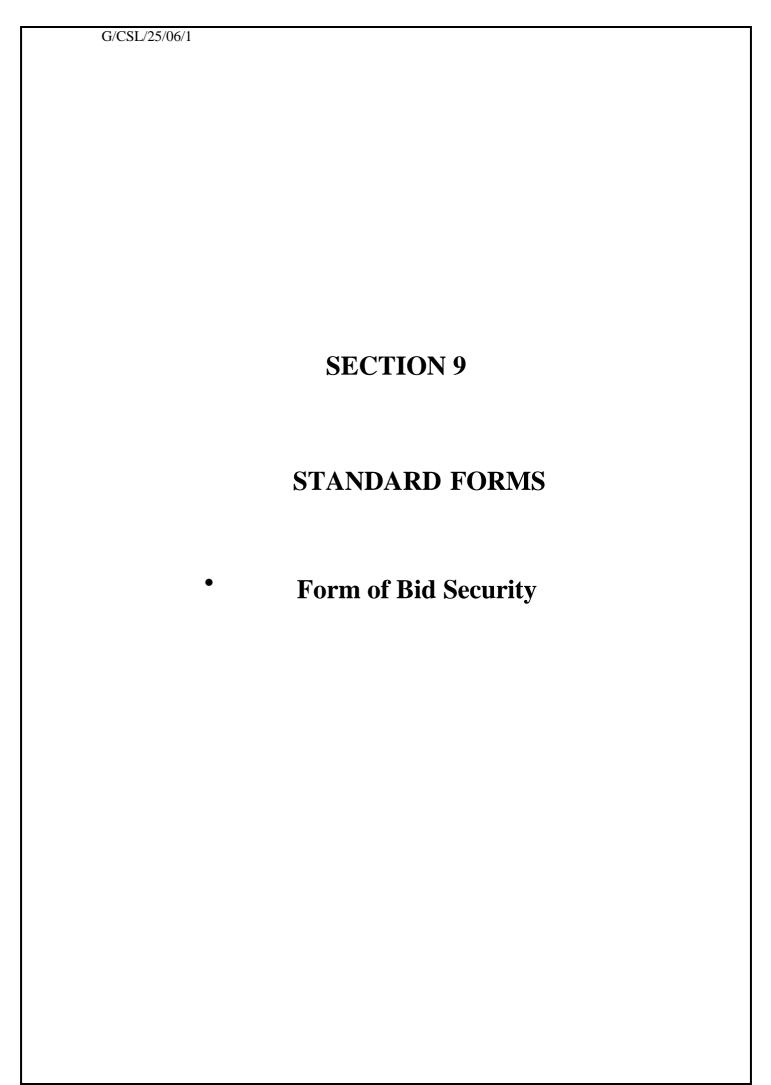

[Letter heading paper of the procuring entity]

[th	is Guarantee form shall be filled in accordance with the instructions indicated in brackets]		
	[insert		
issuing	agency's name, and address of issuing branch or office]		
Benefic	ciary :[insert		
	employer position, office and address]		
Date	: [insert date]		
BID SE	agency's name, and address of issuing branch or office] itary:		
BID G	UARANTEE No. : [insert number]		
We hav	e been informed that		
	pidder] (hereinafter called "the bidder") has submitted to you its bid dated		
[insert			
	more, we understand that, according to your conditions, Bids must be supported by a Bid		
Guarant	tee.		
	e request of the bidder, we		
receipt l	by us of your first demand in writing accompanied by a written statement stating that the Bidder is in		
breach	of its obligation(s) under the bid conditions, because the Bidder:		
(a)	has withdrawn its Bid during the period of bid validity specified; or		
	does not accept the correction of errors in accordance with the Instructions to Bidders (hereinafter "the ITB"); or		
	having been notified of the acceptance of its Bid by the Employer during the period of bid validity, (i) fails or refuses to execute the Contract Form, if required, or (ii) fails or refuses to furnish the Performance Security, in accordance with the ITB.		
Contract bidder	uarantee shall expire: (a) if the bidder is the successful bidder, upon our receipt of copies of the et signed by the bidder and of the Performance Security issued to you by the bidder; or (b) if the is not the successful bidder, upon the earlier of the successful bidder furnishing the performance of the twister it will remain in force up to		
-	uently, any demand for payment under this Guarantee must be received by us at the office on or that date.		
[signatu	ure(s) of authorized representative(s)		
15.5	and the second s		

Check List for Bidders

Bidders are advised to fill the following table:

ITEM	ITB Clause	YES (tick)	REFERENCE
Form of Bid			
Addressed to the Employer?	18		
Completed?	18		
Signed?	18		
Bid Security (if required)			
Addressed to the Employer?	16		
Format as required?	16		
Issuing Agency as specified?	16		
Amount as requested?	16		
Validity 28 days beyond the validity of Bid?	16		
Qualification Information			
All relevant information completed?	4		
Signed?	4		
Addendum			
Content of the addendum (if any) taken in to account?	10		
BID Package			
All the documents given in ITB Clause 12 enclosed in the original and copy?	12		
ITB Clause 19 followed before Sealing the Bid Package?	19		