

MINISTRY OF EDUCATION SOUTHERN PROVINCE

BIDDING DOCUMENT

FOR

REPAIR OF THE 60X20 BUILDING OF H/WAWEGAMA K.V.

Issued to	:
Date	:
Contract No	:
Employer	: Secretary, Ministry of Education, Southern Province.

CONTENTS

Volume 1

Section 1 Instructions to Bidders

Section 2 Standard Forms (Contract)

Section 3 Conditions of Contract

Volume 2

Invitation for Bids

Section 4 Form of Bid and Qualification Information

Section 5 Schedule

Section 6 Specifications

Section 7 Bills of Quantities

Section 8 Drawings

Section 9 Standard Forms (Bid)

Volume 1 consisting of section 1, section 2, section 3 will be applicable for this contract shall be given volume 1 of "Standard Bidding Document, Procurement of Works, Minor Contracts", CIDA publication no: CIDA/SBD/03, Second Edition, January 2007, publish by Construction Industry Development Authority (CIDA), Savusiripaya, 123. Wijerama Mawatha, Colombo 07.

The above Document will not be issued with the Bidding Document and Bidder is advised to purchase it from CIDA.

H/C/25/61/01		
	INVITATION FOR BIDS	

පුසම්පාදන දැන්වීම

දකුණු පළාත් අධාාපන, ඉඩම් හා ඉඩම් සංවර්ධන,මහා මාර්ග හා පුවෘත්ති අමාතාාංශය දකුණු පළාත් සභාව

පළාත් නිශ්චිත සංවර්ධන පුදාන, ක්ලීන් ශී ලංකා වැඩසටහන හා නඩත්තු සැලැස්ම 2025 යටතේ කිුයාත්මක කරනු ලබන පහත සඳහන් වැඩ යෝජනා සඳහා සුදුසුකම් ලත් කොන්තුාත් කරුවන්ගෙන්, දකුණු පළාත් අධාාපන අමාතාාංශයේ පුසම්පාදන කමිටු සභාපති විසින් ලංසු පත් කැඳවනු ලැබේ.

අනු	වාහපෘති	පාසල	වැඩ විස්තරය	කර්මාන්	ආපසු	ලංසු	අවශා	මුළු
đ۰	අංකය			තය ඉටු	නොගෙව	සුරක්ෂණ	CIDA	පිරිවැය
ක				කරනු	නු ලබන	වටිනාකම	ලියාප	ඇස්ත
ය				ලබන	_ ඇප	රු.	දිංචිය	· මේන්තු
				වාහාපෘති	තැන්පත්	-		මුදල
				සැලැස්ම	මුදල රු.			vat
								සමග
								රු. මි.
1	G/C/25/34	ගා/උඩුගම ම.වි	70*25 දෙමහල්	පළාත්				
			ගොඩනැහිල්ලේ -	නිශ්චිත			C 8	
			වහල		2,500.00	34,000.00	හෝ	4.34
			අලුක්වැඩියාව -				ඉහළ	
2	G/C/25/35	ගා/හියාරේ	90*25	පළාත්				
		නැඟෙනහිර ක.වි	ගොඩනැහිල්ලේ -	නිශ්චිත			C 9	
			කොරිඩෝව කොරිඩෝව		1,500.00	26,000.00	හෝ	3.40
			ඉදිකිරීම				ඉහළ	
3	G/C/25/36	ගා/තිත්තගල්ල	180*25 පුධාන	පළාත්				
		අටානිකිත ක.වි	ශාලාවේ වහල	නිශ්චිත	2,500.00	35,000.00	C 8 හෝ	4.41
			අලුත්වැඩියාව		2,300.00	33,000.00	ඉහළ	4.41
4	G/C/25/37	ගා/හපුගල පුා.වි	මායිම් තාප්පය	නඩත්තු			C 9	
			ඉදි කිරීම	සැලැස්ම	1,500.00	27,000.00	හෝ නෙස	3.46
5	G/C/25/38	ගා/නරාවල ම.වි	80*20	නඩත්තු			ඉහළ	
			ගොඩනැහිල්ල	සැලැස්ම	2,500.00	32,000.00	C 8 හෝ	4.10
			අලුත්වැඩියාව			,	ඉහළ	
6	G/C/25/39	ගා/පංචාලිය පුා.වි	පාසල්	නඩත්තු			C 9	
			ගොඩනැහිල්ල	සැලැස්ම	1,500.00	21,000.00	ලො ගෝ	2.73
			අලුත්වැඩියාව				ඉහළ	
7	G/C/25/40	ගා/කළාහාණතිස්ස	80*20	නඩත්තු				
		විදාහාලය	ගොඩනැහිල්ලේ	සැලැස්ම	1.500.00	22 222 22	C 9	6.00
			වහල		1,500.00	22,000.00	හෝ ඉහළ	2.88
			අලුත්වැඩියාව				8 22 6	
8	G/C/25/41	ගා/ජයවර්ධන	80*20	නඩත්තු	1.500.00	25.000.00	C 9	0.1.
		විදාහාලය	ගොඩනැහිල්ල	සැලැස්ම	1,500.00	25,000.00	හෝ ඉහළ	3.14
	l .		4	1	1	l	, , , .	1

H/C/25/	61/0	1
---------	------	---

			අලුත්වැඩියාව					
0	0/0/05/40		CO. 11.20					
9	G/C/25/42	ගා/පැදින්නොරුව	60*20	නඩත්තු			G 0	
		සරණපාල ජයන්ති	ගොඩනැහිල්ලේ	සැලැස්ම	1,500.00	26,000.00	C 9 හෝ	3.35
		පුා.වි	වහල		1,200.00	20,000.00	ඉහළ	5.55
			අලුත්වැඩියාව					
10	G/C/25/43	ගා/ඇත්තිලිගොඩ	100*25	නඩත්තු				
		සුදර්ශි ම.වි	ගොඩනැහිල්ලේ	සැලැස්ම	1,500.00	30,000.00	C 9 හෝ	3.91
			වහල		1,300.00	30,000.00	ඉහළ ඉහළ	3.91
			අලුත්වැඩියාව					
11	G/C/25/44	ගා/මීගහගොඩ	50*20 විදායාගාර	නඩත්තු				
		ක.වි	ගොඩනැහිල්ලේ	සැලැස්ම			C 9	
			වහල		1,500.00	31,000.00	හෝ ඉහළ	3.93
			අලුත්වැඩියාව				စီအ@	
12	G/C/25/45	ගා/කඩිහිංගල ම.වි	70*20 දෙමහල්	නඩත්තු				
			ගොඩනැහිල්ලේ	සැලැස්ම			C 9	
			විදුලි පද්ධතිය		1,500.00	17,000.00	ලහා [†]	2.12
			 නවීකරණය				ඉහළ	
13	13 G/C/25/46	 අම්බලන්ගොඩ	කාර්යාල	නඩත්තු				
		කලාප අධාාාපන	ගොඩනැහිල්ල -	සැලැස්ම	1,500.00	20,000.00	C 9 හෝ	2.49
		කාර්යාලය	අලුත්වැඩියාව		1,500.00	20,000.00	ඉහළ	2.7)
14	G/C/25/47	ගා/වටරැක ශී	40*20	නඩත්තු				
		ි සෝභිත විදාහලය	ගොඩනැ <u>හි</u> ල්ල	සැලැස්ම	1,500.00	25,000.00	C 9 හෝ	3.22
			අලුත්වැඩියාව	(0(1,300.00	23,000.00	ඉහළ ඉහළ	3.22
15	G/C/25/48	ගා/විදාහනන්ද	පැති බැම්ම	නඩත්තු			C 8	
13	G/C/23/10	ක.වි	අලුත්වැඩියාව	සැලැස්ම	2,500.00	34,000.00	හෝ නෝ	4.40
16	G/C/25/49	ගා/උනන්නවිටිය	90*20	නඩන්නු			ඉහළ	
10	G/C/23/49	රේවත ම.වි				• • • • • • •	C 8	
		ිරවත් ම.ව 	ගොඩනැඟිල්ල	සැලැස්ම	2,500.00	36,000.00	හෝ ඉහළ	4.66
17	0/0/25/50	/02 0	අලුත්වැඩියාව				\$00	
17	G/C/25/50	ගා/සිරි පඹංකර	80*20	නඩත්තු			G 0	
		පුා.වි	ගොඩනැහිල්ලේ	සැලැස්ම	1,500.00	25,000.00	C 9 හෝ	3.15
			වහල			,,	ඉහළ	
			අලුත්වැඩියාව					
18	G/C/25/51	ගා/බටදූව සිරි	90*25	නඩත්තු			C 9	
		රතනජෝති ම.වි	ගොඩනැඟිල්ල	සැලැස්ම	1,500.00	26,000.00	ග ෝ	3.28
			අලුත්වැඩියාව				ඉහළ	
19	G/C/25/52	ගා/අක්මීමණ ම.වි	100*20	නඩත්තු			C 8	
			ගොඩනැහිල්ල	සැලැස්ම	2,500.00	38,000.00	ලෙහ මෙහ	4.97
			අලුත්වැඩියාව				ඉහළ	
20	G/C/25/53	ගා/ආනන්ද විජය	90*25	නඩත්තු	1 500 00	25 000 00	C 9	2.21
					1,500.00	25,000.00	හෝ	3.21

H/C/25/	61/	01
---------	-----	----

		විදාහලය	ගොඩනැහිල්ලේ	සැලැස්ම			ඉහළ	
			වහල					
			අලුත්වැඩියාව 					
21	G/C/25/54	ගා/ඉඳුරුව ම.වි	120*20	නඩත්තු				
21	G/C/23/34	ගා/ඉඳුරුව ම.ව					C 8	
			ගොඩනැහිල්ල	සැලැස්ම	3,000.00	49,000.00	නෝ ඉහළ	6.47
			අලුත්වැඩියාව				ඉහළ	
22	G/C/25/55	ගා/තල∘ගහ	වැසිකිළ පද්ධතිය	පළාත්			C 9	
		සරස්වතී දෙමළ	ඉදි කිරීම	නිශ්චිත	1,000.00	16,000.00	ගෝ	1.99
		පාසල					ඉහළ	
23	G/C/25/56	ගා/දික්කුඹුර	120*30 පුධාන	පළාත්			C 8	
		සිද්ධාර්ථ ම.වි	ශාලාව	නිශ්චිත	2,500.00	40,000.00	හෝ නෝ	5.29
			නවීකරණය				ඉහළ	
24	G/C/25/57	ගා/ලේල්වල ක.වි	80*20	පළාත්			G 0	
			ගොඩනැහිල්ල	නිශ්චිත	3,500.00	75,000.00	C 8 හෝ	9.93
			අලුත්වැඩියාව		, , , , , , , , ,	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	ඉහළ	
25	G/C/25/58	ගා/පොරවගම	පැති බැම්ම	පළාත්			C 8	
		ක.වි	අලුත්වැඩියාව	නිශ්චිත	2,500.00	34,000.00	ග ෝ	4.39
26	G/C/25/59	ගා/ගතේගම	80*20 නව	පළාත්			ඉහළ	
20	G/C/25/57	රෝමානු	ගොඩනැහිල්ල ඉදි	නිශ්චිත			C 9	
		කතෝලික පාසල	කිරීම	2,0,000	1,500.00	20,000.00	හෝ ඉහළ	2.60
		ක්ෂතාලක පාසල	කරම				ඉහළ	
27	G/C/25/60	ගා/ශීපති ම.වි	80*20 ඉදමහල්	පළාත්			C 8	
			ගොඩනැහිල්ල ඉදි	නිශ්චිත	2,500.00	37,000.00	නෝ නෝ	4.79
			කිරීම				ඉහළ	
28	G/C/25/61	ගා/මාමනදොළ	90*20	පළාත්				
		ක.වි	ගොඩනැහිල්ලේ	නිශ්චිත			C 8	
			වහල		2,500.00	32,000.00	හෝ නෙස	4.15
			 අලුත්වැඩියාව				ඉහළ	
29	G/C/25/62	ගා/උක්වත්ත	90*25	පළාත්				
		විදාහාලය -	ගොඩනැහිල්ලේ -	නිශ්චිත			C 8	
			ඉදි කිරීම (ඉතිරි		2,500.00	41,000.00	ගෝ	5.42
			වැඩ)				ඉහළ	
30	G/C/25/63	contamba de servicio	මායිම් තාප්පය	n mam²				
50	0/0/25/05	ගා/අක්කරවිස්ස		පළාත්	1,500.00	25,000.00	C 9	3.21
		ක.වි	අලුත්වැඩියාව	නිශ්චිත	1,300.00	43,000.00	හෝ ඉහළ	3.41
	0/0/25/64	ගා/කළුවලගල	40*20	පළාත්				
31	G/C/25/64						C 8	
31	G/C/25/64	ක.වි	ගොඩනැහිල්ල ඉදි	නශවත			_	
31	G/C/25/64	ක.වි	ගොඩනැහිල්ල ඉදි කිරීම	නිශ්චිත	3,000.00	46,000.00	ඉහා ඉහළ	6.07
31		ක.වි	ගොඩනැහිල්ල ඉදි කිරීම	න්ශවත	3,000.00	46,000.00	හෝ ඉහළ	6.07
31	G/C/25/64	ක.වි ගා/අවිත්තාව	1	නශවත පළාත්	3,000.00	46,000.00	ඉහළ	6.07
			කිරීම		3,000.00	46,000.00 29,000.00		3.73

			අලුත්වැඩියාව					
			අපුන්වැගියාව					
33	G/C/25/66	ගා/මහින්ද රාජපක්ෂ ම.වි	මායිම් තාප්පය අලුත්වැඩියාව	පළාත් නිශ්චිත			C 8	
		0100000 0.0	අලුක්ථැසයාථ	2364023	3,000.00	61,000.00	හෝ ඉහළ	7.8
34	G/C/25/67	ගා/ගුණානන්ද	50*25	පළාත්			C 9	
		පුා.වි	ගොඩනැහිල්ල අලුත්වැඩියාව	තිශ්චිත	1,500.00	17,000.00	ගෝ ඉහළ	2.1
35	G/C/25/68	ගා/බී.ටී.එස්	80*20	නඩත්තු			C 0	
		විදාහාලය	ගොඩනැතිල්ල අලුක්වැඩියාව	සැලැස්ම	2,500.00	32,000.00	C 8 හෝ ඉහළ	4.0
36	G/C/25/69	ගා/මාවඩවිල ම.වි	90*25	නඩත්තු				
			ගොඩනැහිල්ල අලුත්වැඩියාව	සැලැස්ම	1,500.00	24,000.00	C 9 හෝ ඉහළ	3.0
37	G/C/25/70	ගා/සිරිනිවාස ම.වි	100*20	නඩත්තු				
			<u>ගොඩනැහිල්ලේ</u>	සැලැස්ම			C 8	
			වහල		2,500.00	40,000.00	හෝ ඉහළ	5.3
			අලුත්වැඩියාව				စီတစ်	
38	G/C/25/71	ගා/දොළහේන	80*20	නඩත්තු				
		ක.වි	ගොඩනැහිල්ලේ	සැලැස්ම	2 500 00	42 000 00	C 8	5.0
			වහල අලුත්වැඩියාව		2,500.00	43,000.00	හෝ ඉහළ	5.6
39		(0)0	,				C9	
	G /C/25/72	ගා/පිලාන තක්ෂිලා පුා.වි.	මායිම් තාප්පය නවීකරණය	පළාත් නිශ්චිත	1,000.00	14,000.00	හෝ ඉහළ	1.8
40	G /C/25/73	ගා/සංඝරතන පුා.වි.	100*20 ගොඩනැගිල්ලේ වහල අලුත්වැඩියාව.	පළාත් නිශ්චිත	2,500.00	34,000.00	C8 හෝ ඉහළ	4.4
41	G/C/25/74	ගා/තෙලිකඩ ම.වි.	80*20 ගොඩනැගිල්ලේ වහල අලුත්වැඩියාව	පළාත් නිශ්චිත	2,500.00	35,000.00	C8 හෝ ඉහළ	4.5
42	G/C/25/75	ගා/කරන්දෙණිය ක.වි.	80*20 ගොඩනැගිල්ල අලුත්වැඩියාව	පළාත් නිශ්චිත	1,500.00	29,000.00	C9 හෝ ඉහළ	3.7
43	G/C/25/76	ගා/ලේනගල්පලා ත ක.වි.	80*20 ගොඩනැගිල්ල අලුත්වැඩියාව	පළාත් නිශ්චිත	1,500.00	27,000.00	C9 හෝ ඉහළ	3.4
44	G /C/25/77	ගා/රතනසාර ම.වි.	100*20 ගොඩනැගිල්ලේ වහල අලුත්වැඩියාව	පළාත් නිශ්චිත	1,500.00	23,000.00	C9 හෝ ඉහළ	2.9
45	G /C/25/78	ගා/යටගල ම.වි.	මායිම් තාප්පය අලුත්වැඩියා කිරීම.	පළාත් නිශ්චිත	2,500.00	39,000.00	C8 හෝ ඉහළ	5.1

1.0		T	T	T	1	1	1	
46	G /C/25/79	ගා/ඕල්කට් ම.වි	80*20 ගොඩනැගිල්ල අලුත්වැඩියාව	පළාත් නිශ්චිත	2,500.00	40,000.00	C8 හෝ ඉහළ	5.3
47	G /C/25/80	ගා/තෙල්ලඹුර විජය ක.වි.	පැති බැම්ම ඉදි කිරීම.	පළාත් නිශ්චිත	2,500.00	34,000.00	C8 හෝ ඉහළ	4.3
48	G /C/25/81	ගා/තියාරේ ම.වි.	80*20 ගොඩනැගිල්ලේ වහල අලුත්වැඩියාව	පළාත් නිශ්චිත	2,500.00	45,000.00	C8 හෝ ඉහළ	5.8
49	G /C/25/82	ගා/උස්වතුන් හසානා ම.වි.	160*25 තෙමහල් ගොඩනැහිල්ලේ වහල අලුත්වැඩියාව.	පළාත් නිශ්චිත	2,500.00	34,000.00	C8 හෝ ඉහළ	4.4
50	G /C/25/83	ගා/බුද්ධදත්ත පුා.වි.	120*20 පුධාන ශාලාව අලුත්වැඩියාව	පළාත් නිශ්චිත	3,500.00	64,000.00	C8 හෝ ඉහළ	8.4
51	G /C/25/84	ගා/සිරි අහයතිස්ස ක.වි.	දෙමහල් ගොඩනැහිල්ලේ යකඩ ගුීල් සවි කිරීම.	නඩත්තු සැලැස්ම	1,000.00	16,000.00	C9 හෝ ඉහළ	1.9
52	M/C/25/31	මාර/පර්සි අබේවර්ධන විදාහාලය	80*20 ගොඩනැහිල්ලේ වහල අලුත්වැඩියාව.	නඩත්තු සැලැස්ම	2,500.00	40,000.00	C8 හෝ ඉහළ	5.3
53	M/C/25/44	මාර/ජිනරාජ ක.වී.	වැසිකිළි පද්ධතිය අලුත්වැඩියා කිරීම.	පළාත් නිශ්චිත	1,500.00	22,000.00	C9 හෝ ඉහළ	2.1
54	M/C/25/52	අකුරැස්ස කලාප අධාාපන කාර්යාලය	පැති බැම්ම පුතිසංස්කරණය කිරීම	නඩත්තු සැලැස්ම	1,500.00	28,000.00	ි C 9 හෝ ඉහළ	3.5
55	M/C/25/53	මාර/කරගොඩ උයන්ගොඩ ම.වි	වැසිකිළි පද්ධතිය ඉදි කිරීම	පළාත් නිශ්චිත	1,500.00	20,000.00	C 9 හෝ ඉහළ	2.5
56	M/C/25/54	මාර/බැරගම ක.වි	වැසිකිළි පද්ධතිය ඉදි කිරීම	පළාත් නිශ්චිත	1,500.00	19,000.00	C 9 හෝ ඉහළ	2.4
57	M/C/25/55	මාර/පොල්වක්ත පුා.වි	පුධාන ශාලාව අලුත්වැඩියා කිරීමේ ඉතිරි වැඩ සම්පූර්ණ කිරීම	පළාත් නිශ්චිත	2,500.00	34,000.00	C 8 හෝ ඉහළ	4.4
58	M/C/25/56	මාර/මාතර ආදර්ශ පුා.වි	වැසි ජලය කළමනාකරණ පද්ධතිය නවීකරණය කිරීම	පළාත් නිශ්චිත	1,500.00	21,000.00	C 9 හෝ ඉහළ	2.6
59	M/C/25/57	මාර/කිරින්ද ආදර්ශ පුා.වි	70*25 දෙමහල් ගොඩනැගිල්ල නවීකරණය කිරීම	පළාත් නිශ්චිත	4,000.00	79,000.00	C 7 හෝ ඉහළ	10.4
50	M/C/25/58	මාර/තල්පාවිල ම.ම.වි	කුීඩා පිටිය සංවර්ධනය කිරීම	පළාත් නිශ්චිත	2,500.00	42,000.00	C 8 හෝ ඉහළ	5.4
51	M/C/25/59	මාර/කඹුරුගමුව ම.වි	80*20 තති මහල් ගොඩනැගිල්ල 90*25 දෙමහල් ගොඩනැගිල්ලට නවීකරණය කිරීම (අදියර 01)	පළාත් නිශ්චිත සංවර්ධන පුදාන	4,000.00	88,000.00	C 7 හෝ ඉහළ	11.6

62	M/C/25/60	මාර/බෙලිදෙණිය ම.වි	60*20 ගොඩනැගිල්ලේ වහල අලුත්වැඩියා	පළාත් නිශ්චිත	1,500.00	27,000.00	C 9 හෝ ඉහළ	3.57
63	H/C/25/26	හ/මහගල්වැව ක.වි	කිරීම 90*25 දෙමහල් ගොඩනැහිල්ලේ බිම මහලේ කාර්යාල කාමරය සකස් කිරීම	නඩත්තු සැලැස්ම	1,500.00	21,000.00	C 9 හෝ	2.73
64	H/C/25/27	හ/දුටුගැමුණු ම.වි	90*25 තෙමහල් ගොඩනැහිල්ලේ වහලය අලුත්වැඩියාව	නඩත්තු සැලැස්ම	1,500.00	23,000.00	ඉහළ C 9 හෝ ඉහළ	3.05
65	H/C/25/28	හ/සපුතන්තීකන්ද පුා.වි	පැති බැම්ම හා ජල කුළුණ ඉදි කිරීම	පළාත් නිශ්චිත	1,500.00	20,500.00	C 9 හෝ ඉහළ	2.7
66	H/C/25/29	හ/මිද්දෙනිය ම.වි	රැඳවුම් තාප්පය ඉදිකිරීම (කුීඩා පිටිය සඳහා ආරක්ෂක තාප්පය)	පළාත් නිශ්චිත	3,000.00	47,500.00	C 8 හෝ ඉහළ	6.27
67	H/C/25/30	හ/ගහේයාය ක.වි	80*20 ගොඩනැහිල්ල අලුත්වැඩියාව	පළාත් නිශ්චිත	1,500.00	27,000.00	C 9 හෝ ඉහළ	3.55
68	H/C/25/31	තංගල්ල කලාප අධාාපත කාර්යාලයේ	මායිම් තාප්පය ඉදිකිරීම(ඉතිරි වැඩ)	පළාත් නිශ්චිත	1,000.00	12,000.00	C 9 හෝ ඉහළ	1.49
69	H/C/25/32	හ/බෙලිඅත්ත ම.ම.වි	100*20 තාක්ෂණික විදාහාගාරය ගොඩනැහිල්ල නවීකරණය	පළාත් නිශ්චිත	3,500.00	67,500.00	C 8 මහා්	8.91
70	H/C/25/33	හ/කදිරගොඩ පුා.වි	වැසිකිළ අලුත්වැඩියාව	නඩත්තු සැලැස්ම	1,500.00	18,000.00	ඉහළ C 9 හෝ ඉහළ	2.28
71	H/C/25/34	හ/ගොඩවානගොඩ ක.වි	වැසිකිළි අලුත්වැඩියාව සහ මායිම් තාප්පය අලුත්වැඩියාව	නඩත්තු සැලැස්ම	1,500.00	21,000.00	C 9 හෝ ඉහළ	2.67
72	H/C/25/35	හ/කුඩාවැල්ල ක.වි	වැසිකිළි අලුත්වැඩියාව	නඩත්තු සැලැස්ම	1,000.00	14,000.00	C 9 හෝ ඉහළ	1.82
73	H/C/25/36	හ/රදනිආර ම.වි	පරිගණක විදාහාගාරය අලුත්වැඩියා කිරීම	නඩත්තු සැලැස්ම	1,500.00	23,000.00	C 9 හෝ ඉහළ	2.94
74	H/C/25/37	හ/කිරම ධම්මානන්ද පුා.වි	80*20 ගොඩනැහිල්ල අලුත්වැඩියාව	නඩත්තු සැලැස්ම	2,500.00	37,000.00	C 8 හෝ ඉහළ	4.80
75	H/C/25/38	හ/කෑරදෙනිය ක.වි	40*20 ගොඩනැහිල්ල අලුත්වැඩියාව	නඩත්තු සැලැස්ම	1,500.00	28,000.00	C 9 හෝ ඉහළ	3.69
76	H/C/25/39	හ/අගලබඩ ක.වි	60*20 ගොඩනැහිල්ල අලුත්වැඩියා කිරීම	නඩත්තු සැලැස්ම	1,500.00	23,000.00	ද පළ C 9 හෝ ඉහළ	2.97
77	H/C/25/40	හ/අල්අමීර් මුස්ලිම විදාහාලය	මායිම් තාප්පය අලුත්වැඩියාව	නඩත්තු සැලැස්ම	1,500.00	16,000.00	C 9 හෝ ඉහළ	2.08

H/	C/2	25/	61	/01
----	-----	-----	----	-----

78	H/C/25/41	හ/පල්ලෙජූලම්පිටි	60*20				C 9	1
70	П/С/25/41	ය ම.වි	60°20 ගොඩනැහිල්ල	නඩත්තු			ගෝ නෝ	3.93
		ω Θ.Ο	අලුත්වැඩියා කිරීම	නාසනනු සැලැස්ම	1,500.00	30,000.00		3.93
79	11/0/25/42	n/m 98900		ಹ್ಮೀರ್ಡಿ	1,300.00	30,000.00	ඉහළ	
19	H/C/25/42	හ/කැකිරිඕබඩ	පුස්තකාල	O P			C 8	F 1
		ක.වි	ගොඩනැහිල්ල	නඩත්තු	2 500 00	20 000 00	හෝ	5.1
0.0		/	අලුත්වැඩියාව	සැලැස්ම	2,500.00	39,000.00	ඉහළ	
80	H/C/25/43	හ/බෙරලිහෙල ම.වි	80*20					
			ගොඩනැහිල්ල					
			සහ 50*25					
			කාර්යාල					2.74
			ගොඩනැහිල්ල				C 9	
			වහල	නඩත්තු			හෝ	
			අලුත්වැඩියාව	සැලැස්ම	1,500.00	21,000.00	ඉහළ	
81	H/C/25/44	හ/ගැටමාන්න	100*20					
	, , ,	දකුණ ම.වි	ගොඩනැහිල්ලේ				C 8	
			වහල	නඩත්තු			ග ෝ	4.87
			අලුක්වැඩියාව	සැලැස්ම	2,500.00	37,000.00	ඉහළ	
82	H/C/25/45	හ/ගැටමාන්න	100*20	سرررسو		07,000.00	900	
02	11/ 6/ 23/ 43	උතුර ක.වි	ගොඩනැහිල්ලේ -				C 8	
		උතුර කා.ප		නඩත්තු			ගෝ නෝ	5.07
			වහල අලුත්වැඩියාව		2,500.00	39,000.00		
83	11/6/25/46	/೧۴ 8	80*20	සැලැස්ම	2,300.00	39,000.00	ඉහළ	
83	H/C/25/46	හ/බූන්දල ක.වි					6.0	
			ගොඩනැහිල්ලේ	- 0			C 8	4.22
			වහල	නඩත්තු	2 500 00	22 222 22	හෝ	
			අලුත්වැඩියාව	සැලැස්ම	2,500.00	32,000.00	ඉහළ	
84	84 H/C/25/47	හ/පලපොත ම.වි	100*20					
			ගොඩනැහිල්ලේ				C 9	3.55
			වහල	නඩත්තු			හෝ	3.55
			අලුත්වැඩියාව	සැලැස්ම	1,500.00	27,000.00	ඉහළ	
85	H/C/25/48	හ/බටඅත දකුණ	40*20				C 9	
		ක.වි	ගොඩනැහිල්ල	නඩත්තු			ග ෝ	2.49
			අලුත්වැඩියාව	සැලැස්ම	1,500.00	19,000.00	ඉහළ	
86	H/C/25/49	හ/කහවත්ත ම.වි	නෙප්වූන්				C 8	
	, -, -, -		ගොඩනැහිල්ල	නඩත්තු			ග ෝ	8.00
			අලුත්වැඩියාව	සැලැස්ම	3,000.00	61,000.00	ඉහළ	
87	H/C/25/50	හ/කණුකැටිය	80*20	100	,	•	C 9	
0,	11, 0, 23, 30	ක.වි	ගොඩනැහිල්ල -	නඩත්තු			ලහා ්	3.06
		3.3	අලුක්වැඩියාව	සැලැස්ම	1,500.00	24,000.00	ඉහළ	3.00
88	H/C/25/51	හ/දෙබරවැව	120*20	ωισιωσ	1,500.00	2 1,000.00	မွတ်(၆	
00	H/C/23/31	ජනාධිපති					C 8	
		විදාහාලය	ගොඩනැහිල්ලෙ	OP				5.25
		Ο ζωίζω	වහල	නඩත්තු	2,500.00	40,000.00	හෝ 	
00	11/0/05/50	/ 0 0 0	අලුක්වැඩියාව	සැලැස්ම	2,500.00	40,000.00	ඉහළ	
89	H/C/25/52	හ/දෙනිය පි∙ගම	80*20					
		ක.වි	ගොඩනැහිල්ලේ				C 9	2.44
			වහල	නඩත්තු			හෝ	
			අලුත්වැඩියාව	සැලැස්ම	1,500.00	19,000.00	ඉහළ	
00 H/C/25/52	H/C/25/53	හ/මීගහවෙල ක.වි	120*20					
90	11/ 0/ 23/ 33		ගොඩනැහිල්ලේ				C 9	2.2
90	11/ 0/23/33						1	۷.۷
90	11, 6, 23, 33		වහල සහ වැසිකිළි	පළාත්			හෝ	
90	11, 6, 23, 33			පළාත් නිශ්චිත	1,500.00	17,000.00	හෝ ඉහළ	
	H/C/25/54	හ/මොරයාය ම.වි	වහල සහ වැසිකිළි		1,500.00	17,000.00		
		හ/මොරයාය ම.වි	වහල සහ වැසිකිළි අලුත්වැඩියාව 120*20	නිශ්චිත	1,500.00	17,000.00	ඉහළ	7.94
		හ/මොරයාය ම.වි	වහල සහ වැසිකිළි අලුත්වැඩියාව 120*20 ගොඩනැහිල්ල	නිශ්චිත පළාත්		17,000.00	ඉහළ C 8 හෝ	7.94
91	H/C/25/54		වහල සහ වැසිකිළි අලුත්වැඩියාව 120*20 ගොඩනැහිල්ල අලුත්වැඩියාව	නිශ්චිත	1,500.00 3,000.00		ඉහළ C 8 හෝ ඉහළ	7.94
91		හ/වෑකඳවල	වහල සහ වැසිකිළි අලුත්වැඩියාව 120*20 ගොඩනැහිල්ල අලුත්වැඩියාව 120*20	නිශ්චිත පළාත් නිශ්චිත			ඉහළ C 8 හෝ ඉහළ C 8	
91	H/C/25/54		වහල සහ වැසිකිළි අලුත්වැඩියාව 120*20 ගොඩනැහිල්ල අලුත්වැඩියාව 120*20 ගොඩනැහිල්ල	නිශ්චිත පළාත් නිශ්චිත පළාත්	3,000.00	60,000.00	ඉහළ C 8 හෝ ඉහළ C 8 හෝ	7.94 8.33
91 92	H/C/25/54 H/C/25/55	හ/වෑකඳවල ජනපද ම.වි	වහල සහ වැසිකිළි අලුත්වැඩියාව 120*20 ගොඩනැහිල්ල අලුත්වැඩියාව 120*20 ගොඩනැහිල්ල අලුත්වැඩියාව	නිශ්චිත පළාත් නිශ්චිත			ඉහළ C 8 හෝ ඉහළ C 8 හෝ ඉහළ	
91	H/C/25/54	හ/වෑකඳවල	වහල සහ වැසිකිළි අලුත්වැඩියාව 120*20 ගොඩනැහිල්ල අලුත්වැඩියාව 120*20 ගොඩනැහිල්ල	නිශ්චිත පළාත් නිශ්චිත පළාත්	3,000.00	60,000.00	ඉහළ C 8 හෝ ඉහළ C 8 හෝ	

H/0	C/25	5/61	L/01

			පුතිසංස්කරණය කිරීම				ඉහළ	
94	H/C/25/57	හ/ලුණුගම්චෙහෙර ම.වි	වැසිකිළි පද්ධතිය ඉදිකිරීම	පළාත් නිශ්චිත	1,500.00	16,000.00	C 9 හෝ ඉහළ	2.00
95	H/C/25/58	හ/කටුවන පුා.වි	විදහාලයේ පැති පැම්ම ඉදි කිරීම	පළාත් නිශ්චිත සංවර්ධන පුදාන	2,500.00	35,000.00	C 8 හෝ ඉහළ	4.55
96	H/C/25/59	හ/රතනජෝති පුා.වි,ගභුලන්දෙනි ය	පැතිබැම්ම ඉදි කිරීම (කීඩා පිටිය ඉදිරිපස)	පළාත් නිශ්චිත	2,500.00	40,000.00	C 8 හෝ ඉහළ	5.28
97	H/C/25/60	හ/වැවේගම ක.වි	60*20 ගොඩනැඟිල්ල අලුත්වැඩියාව	නඩත්තු සැලැස්ම	1,500.00	24,000.00	C 9 හෝ ඉහළ	3.10
98	H/C/25/61	හ/පොළොම්මාරුව ආදර්ශ විදාහාලය	වැසිකිළි අලුත්වැඩියාව	නඩත්තු සැලැස්ම	1,500.00	17,000.00	C 9 හෝ ඉහළ	2.2
99	G/CSL/25/01	ගා/උනන්විටිය රේවත ම.වි.	පැති බැම්ම ඉදි කිරීම	ක්ලීන් ශී ලංකා	1,500.00	23,000.00	C 9 හෝ ඉහළ	2.8
100	G/CSL/25/02	ගා/ඇත්තිලිගොඩ සුදර්ශි ම.වි.	80 X 20 ගොඩනැගිල්ල නවීකරණය	ක්ලීත් ශී ලංකා	1,000.00	16,000.00	C 9 හෝ ඉහළ	1.9
101	G/CSL/25/03	ගා/දෙල්ලව ම.වි.	පැති බැම්ම ඉදි කිරීම	ක්ලීන් ශී ලංකා	1,500.00	29,000.00	C 9 හෝ ඉහළ	3.6
102	M/CSL/25/01	මාර/දම්පැල්ල ම.වි.	සංගීත හා නැටුම් කාමර නවීකරණය	ක්ලීන් ශී ලංකා	1,000.00	9,000.00	C 9 හෝ ඉහළ	1.1
10 3	G/CSL/25/0 4	ගා/ රතනසිරි රාජකීය විදහාලය	ගැහැණු වැසිකිලි ඉදි කිරීම	ක්ලීන් ශී ලංකා	1,500.00	29,000.00	C 9 හෝ ඉහළ	3.7
10 4	G/CSL/25/0 5	ගා/ අනුරුද්ධ ක.වි.	වැසිකිලි නවීකරණය (පිරිමි වැසිකිලි 02 හා ගැහැණු වැසිකිලි 04)	ක්ලීන් ශී ලංකා	1,000.00	8,000.00	C 9 හෝ ඉහළ	1.0
10 5	G/CSL/25/0 6	ගා/සිරි අභයතිස්ස ම.වි.	ගුරුවරුන්ගේ සහ සිසුන්ගේ වැසිකිලි නවීකරණය	ක්ලීත් ශී ලංකා	1,500.00	22,000.00	C 9 හෝ ඉහළ	2.8
10 6	G/CSL/25/0 7	ගා/දික්කුඹුර පුා.වි.	වැසිකිලි පද්ධතියක් ඉදි කිරීම	ක්ලීන් ශී ලංකා	2,500.00	33,000.00	C 8 හෝ ඉහළ	4.2
10 7	G/CSL/25/0 8	ගා/හව්ජේ ම.වි.	වැසිකිලි නවීකරණය	ක්ලීන් ශී ලංකා	1,000.00	7,000.00	C 9 හෝ ඉහළ	0.9
10 8	G/CSL/25/0 9	ගා/හප්පිටිය ක.වි.	ගුරුවරුන්ගේ වැසිකිලි ඉදි කිරීම	ක්ලීන් ශී ලංකා	1,500.00	29,000.00	C 9 හෝ ඉහළ	3.7

10 9	G/CSL/25/1 0	ගා/බටපොල ම.ම.වී.	වැසිකිලි ඉදි කිරීම	ක්ලීන් ශී ලංකා	2,500.00	34,000.00	C 8 හෝ ඉහළ	4.3
							0 0	

02. ජාතික තරහකාරී ලංසු පටිපාටිය මත ලංසු ඉදිරිපත් කළ යුතුය. කොන්තුාත් පුදානයේදී සුදුසුකම් ලබන සාර්ථක ලංසුකරුවන් අසාධු ලේඛනගත නොවිය යුතු අතර ඉදිකිරීම් කර්මාන්ත සංවර්ධන අධිකාරියේ ඉහත කාණ්ඩ යටතේ ලියාපදිංචි වී සිටිය යුතුය.

03.ලංසු අයදුම්පත් 2025.06.18 දින සිට 2025.07.03 දින දක්වා පෙ.ව 9.00 සිට ප.ව 3.00 දක්වා ඉහත දක්වා ඇති පරිදි ආපසු නොගෙවන ගාස්තුව අධාාපන අමාතාංශයේ ගිණුම් අංශයේ සරප් වෙත මුදල් ගෙවීමෙන් අනතුරුව ලබාදෙන මුදල් කුවිතාන්සිය ඉදිරිපත් කර හෝ ආපසු නොගෙවන ගාස්තුව අධාාපන අමාතාංශ ලේකම් නමින් ගාල්ල කොටුව ලංකා බැංකුවේ ඇති ගිණුම් අංක 1587423 ට බැර කර රිසිට පත සමග ඔබගේ ඉල්ලීම් ලිපිය ද.ප. අධාාපන අමාතාංශයේ 070 7130700 දරණ වට්ස්අප් අංකයට පමණක් හෝ acc.moesp@gmail.com ඊ මේල් ලිපිනයට පමණක් යොමු කිරීමෙන් ඔබට අවශා ලංසු පතිකා තැපැල් මගින් හෝ කූරියර් කර හෝ ඊමේල් මගින් හෝ වටස්අප් මගින් ගෙන්වා ගැනීමට හෝ ලබුදුව,දක්ෂිණපාය අධාාපන අමාතාාංශයෙන් (බිම් මහල) ගිණුම් අංශයෙන් ලබා ගත හැකිය. වැඩි විස්තර අමාතාාංශයේ 091-2030700 දුරකථන අංකයට වැඩ කරන දින ඇමතීමෙන් හෝ ද.ප. අධාාපන අමාතාාංශ

04. මුදා තබන ලද ලංසු පතිකා 2025.07.04 පෙ.ව 11.00 ට පෙර ලැබෙන සේ ලේකම්, දකුණු පළාත් අධාාපන අමාතාාංශය, දක්ෂිණපාය, ලබුදුව, ගාල්ල යන ලිපිනයට ලියාපදිංචි තැපෑලෙන් එවීමට හෝ අතින් රැගෙන විත් පුධාන ගණකාධිකාරී නිල කාමරයේ තබා ඇති ටෙන්ඩර් පෙට්ටියට බහාලිය හැකිය. පුමාද වී ලැබෙන ලංසු පුතික්ෂේප කරනු ලැබේ.

05.ලංසු විවෘත කිරීම 2025.07.04 දින පෙ.ව 11.00 ට ලංසු පතිකා භාරගෙන අවසන් වූ වහාම දකුණු පළාත් අධාාපන අමාතාාංශයේ පුසම්පාදන කමිටු සභාපතිගේ පුධානත්වයෙන් අමාතාාංශයේදී සිදු කරන අතර එම අවස්ථාවට ලංසුකරුට හෝ ලංසුකරුගේ බලයලත් නියෝජිතයන් හට සහභාගී විය හැක.

06. ලංසුව සමහ ඉදිරිපත් කරන ලංසු සුරක්ෂණය ශී ලංකා වාණිජ බැංකුවකින් දකුණු පළාත් අධාාාපන අමාතාාංශයේ ලේකම් නමට ලබා ගත් 2025.07. 04 දින සිට 2025.10.04 දක්වා වලංගු ලංසු ඇපකරයක් හෝ අධාාාපන අමාතාාංශයේ ගිණුම් අංශය වෙත මුදල් ගෙවීමෙන් අනතුරුව ලබාදෙන මුදල් කුවිතාන්සියේ පිටපත ලංසු පතිකාව සමහ ඉදිරිපත් කළ යුතුය.

07. ලංසු වලංගු කාලය දින 77 කි.

08. ඉදිරිපත් කරනු ලබන කර්මාන්තයට අදාල ලංසු පිටපත් දෙකකින් යුතුව ඉදිරිපත් කළයුතු අතර එහි මුල් පිටපතෙහි " මුල් පිටපත" යනුවෙන් සඳහන් කළ යුතු අතර අනු පිටපතෙහි " අනුපිටපත" යනුවෙන් සඳහන් කළ යුතුය. ලංසුපත් වල මුල් පිටපත හා අනුපිටපත වෙන වෙනම කවරවල බහා මුදුා තබා එම කවර දෙක එක් කවරයක බහා එම කවරය මුදුා තබා කවරයේ වම් පස උඩකෙළවරේ කර්මාන්තයේ නම සහ අංකය සඳහන් කළ යුතුය.

09. ඔබ විසින් ඉදිරිපත් කිරීමට නියමිත සෑම ලංසු පතුිකාවෙහිම මිල ගණන් සඳහන් කර ඇති පිටු අංකයන්හි ඔබ විසින් සඳහන් කළ යුතු ඒකක මිල ගණන් හා මුළු මුදල දැක්වෙන තීරය සහ සාරාංශයද (වට්ටම් දැක්වෙන තීරයද ඇතුලත්ව) විනිවිද පෙනෙන සේ සෙලෝටෙප් කර ලංසු ඉදිරිපත් කිරීම අනිවාර්ය වේ.

10. ද.ප. අධාාපන අමාතාාංශය දැනටමක් දකුණු පළාතේ පාසල්වල ඉදිකිරිම් අලුත්වැඩියා හා නඩත්තු කටයුතුවලට අදාල වාාපෘති සියයක පමණ පුසම්පාදන කටයුතු අවසන් කර ඉදිකිරිම් කටයුතු ආරම්භ කර ඇත.එමෙන්ම මෙම වාාපෘති

2025.06.18

එකසිය නමයෙහි ද පුසම්පාදන කටයුතු හැකි ඉක්මනින් අවසන් කර වාපෘතිවල වැඩ 2025 වසරේ දෙසැම්බර් මස වනවිට අවසන් කල යුතු බැවින් ලංසුකරුවන්ගේ ධාරිතාවය පිළිබඳ ලංසු පුදානයේදී සලකා බලනු ලැබේ.

11.අඩුපාඩු සහිත ලංසුපතුිකා පුතික්ෂේප කරනු ලබන ලැබේ. මෙම පුසම්පාදනය සම්බන්ධයෙන් පුසම්පාදන කමිටුවේ තීරණය අවසාන තීරණය බව සැලකිය යුතුය.

ඒ.යූ.වේලාරත්ත, පුසම්පාදත කමිටු සභාපති, දකුණු පළාත් අධාහපත අමාතාහංශය, පළමු මහල, දක්ෂිණපාය, ලබුදූව, ගාල්ල.

දුරකථන අංකය - 0912030700 ඊමේල් - acc.moesp@gmail.com

H/C/25/61/01
SECTION 4
SECTION 4
FORM OF BID AND QUALIFICATION INFORMATION
TORM OF DID MIND QUILLITERITION INFORMATION

Witness

FORM OF BID

: Repair of the 60x20 building of H/Wawegama K.V. Name of Contract To : Secretary, Ministry of Education, Southern Province. Gentleman, Having examined the Standard Bidding Document - Procurement of Works - Minor Contracts [ICTAD/ SBD/ 03 Second Edition, January 2007], Schedule, Specifications, Drawings and Bills of Quantities and addenda for the execution of the above named Works, we/I the undersigned, offer to execute and complete such Works and remedy any defect therein in conformity with the aforesaid Conditions of Contract, Schedule, Specifications, Drawings, Bill of Quantities Addenda the Sri Lankan and for sum of Rupees (LKR) or such other sums as may be ascertained in accordance with the said Conditions. We/I acknowledge that the Schedule forms part of our/my Bid. We/I undertake, if our Bid is accepted, to commence the Works as stipulated in the Schedule, and to complete the whole of the Works comprised in the Contract within the time stated in the Schedule. We/I agree to abide by this bid for the period stated in the Sub-Clause 15 of Instructions to Bidders or any extended period and it shall remain binding upon us and may be accepted at any time before the expiration of that period. Unless and until a formal agreement is prepared and executed this Bid, together with your written acceptance thereof, shall constitute a binding contract between us/me. We/I understand that you are not bound to accept the lowest or any Bid you may receive. tenders for and on behalf of (IN BLOCK CAPITALS) Signature . Name . Designation • Address

•

Qualification Information

(to be completed by the bidder and submitted with the Bid)

	Eligibility Require	ment		Bidder's Qualification
ICTAD Registration				
Registration number				
Grade	C9 or Above			
Speciality	Buildings			
Expiry Date				
Backlisted Contractors				
Have you been declared as a d Agency?	efaulted contractor by NPA or	any other		Yes /No
IF yes provide details				
VAT Registration Number				
Construction Program	(attach as annex)			
Legal status	Public company/Private Compa	any/Partnersh	ip/S	ole proprietor
	Eligibility Requirement		Bi	dder's Qualification
Qualification and experience of key staff	Category, Experience and Qualifications (Insert requirement)*	Required Nos.*	(N	oposed by bidder ame, experience and nalifications)
	1			
	2			
	3			
List Other information required				

Signature of the Bidder:.....

H/C/25/61/01	
	SECTION 5
	SCHEDULE

Schedule

ITB Clause	Conditions of Contract Clause	Item	Data
1.	1.1.8	Employer is:	Name: Secretary Address: Ministry of Education, Southern Province.
	1.1.10	Engineer is:	Name: District Engineer (Buildings) Address: District Engineer (Buildings) Office, 2 nd Floor, Administrative Complex, Hambantota.
1 & 13	1.1.21	Summary of Works	The Works consists of: Located at: H/Wawegama K.V. Contract Name: Repair of the 60x20 building Contract Number H/C/25/60
	1.1.14	Intended Completion Date	Intended Completion Date is 75 Days from the Start Date
2.		Source of Funds	The source of funds is
3.		Eligibility	The requirement is CIDA C9 or Above
12.		Documents of the Bid	Any other information
13.	10.10	Price Adjustment	The Contract is—/ is not subject to price adjustment in accordance with Sub-Clause 10.10 of the Conditions of Contract. The price adjustment shall be computed in accordance with Option B under sub clause 10.10.
			Non adjustable element shall be: BOQ Item Numbers :
			Option B: Type of Construction: Non residential buildings

H/C/25/	61/01		
16.		Bid Security	Bid shall include a Bid Security:
			for an amount LKR 24,000.00 issued by an agency acceptable to Employer using the form for bid security (unconditional guarantee) included in Section 9, Standard Forms, remain valid till 2025.10.04
			or
			if paid by cash to the Employer, LKR 24,000.00
31.	4.4	Performance Security	Amount of Performance Security required is 5% of the Initial Contract Price
			The form acceptable is unconditional guarantee as standard form as per SBD/03
	6.4	Late Completion	The amount to be paid is 0.05 % of Initial Contract Price per Day, subjected to maximum of 10 % of Initial Contract Price.
	8.1	Notification of Defects	The period for Defect Notification is 180 Days from Taking Over.
	10.3	Retention	The amount of retention is 10% of certified work done.
			The maximum amount of retention is 5 % of Initial Contract Price.
	10.12	Advance Payment	Upon the payment of the advance payment in full the Employer shall return the original of the advance payment guarantee to the Contractor.
	13.1 (c)	Insurance, third party	Minimum amount for third party insurance is LKR 100,000.00
	13.1 (a)	Insurance for Works, Material and plant	The minimum cover for insurance of the works and plant and materials is 110% of initial contract price.
	13.1	Insurance for Contractor's Personnel	Minimum amount for Insurance is LKR 500,000.00
33.	1.1.11	Adjudicator	CIDA
	14.0	Resolution of Disputes	Deputy Chief Secretary (Engineering Services), Southern Province
			Fees and types of reimbursable expenses to be paid to the Adjudicator shall be on a case to case basis and shall be shared by the Contractor and the Employer.

H/C/25/61/01		
	SECTION 6	
	SPECIFICATIONS	

TECHNICAL SPECIFICATIONS

Technical specification that are applicable to this project are listed below:

SCA/3/1 - Irrigation and Land Drainage

SCA/3/2 - Water Supply Sewerage and Storm Water Drainage

SCA/3/3 - Reclamation Works

SCA/3/4 - Ground Water Exploration & Exploitation

SCA/4/I - Building Works (Vol I)

SCA/4/II - Building Works (Vol II)

SCA/5 - Roads and Bridges

SCA/6 - Coastal Harbour Engineering Works

SCA/8 - Electrical and Mechanical Works

ICTAD/DEV/16 - Board & Cast In situ Reinforced Concrete Piles

ICTAD/DEV/17 - Site Investigation for Building Works & Sample Bill of Quantities

Any other specification approved by the Government.

Above publications shall be purchase from the Construction Industry Development Authority (CIDA), Savusiripaya, 123. Wijerama Mawatha, Colombo 07.

H/C/25/61/01		
	SECTION 7	
	BILL OF QUANTITIES	

REPAIR OF THE 60X20 BUILDING OF H/ WAWEGAMA K.V.

ID	Description	Unit	Qty.	Rate	Amount				
	60'x20' building re	enovatio	on						
	DEMOLISH WORKS								
1	Demolishing brickwork in cement clearing debris away from site-for wiring	cu.m	0.50						
	Total carried to summary								
	CONCRETE WORKS								
2	Cement concrete 1:3:6 (1")(Shuttering paid separately) incl: curing(Grade 15)-steps	cu.m	0.15						
	Total carried to summary								
	PLASTER WORKS								
3	1/2" thk 1:3 Cement Rendering finished smooth with neat cement floating, Ground floor(sand to be sieved with 1/8" nets) Rate to include curing	sq.m	1.65						
4	Cement Sand plastering to wall 1:5, (5/8") thick semi rough G: floor rate to include curing	sq.m	3.00						
	Total carried to summary								
	ELECTRICAL WORKS								
5	Supply and fixing 56" sweep ceiling fan with electronic fan speed controller concealed conduit wiring (1/1.13 wire 1.0mm2, 1/1.13 earth wire 1mm2)including gang switch all complete as per instruction with safety cable and switch (Make KDK with warenty) (SLSI Approved makes) (model N56RG) (Switches - ACL/Chint/Krypton/Orange) (Cable - ACL/Kelani/Orange/Sierra) (Conduit - krypton/Polycrome) (fittings -krypton/Polycrome/Orange)	nr	6.00						
6	Supply and fixing 01 No. Pendent type lamp(9 W LED Bulb - efficacy:85 lumen/W or above with two years warenty) with GANG switch Complete with necessary concealed conduit wiring as per working order.(Switch - ACL/Chint/Krypton/Orange) (Cable - ACL/Kelani/Orange/Sierra) (fittings - krypton/Polycrome/Orange) (Conduit - krypton/Polycrome) (Bulb - Orange electric ECO LITE/ ZENOI/ Kelani)) [Cable SLS 733, Switch SLS 1000 Bulb SLS 984]	nr	8.00						

ID	Description	Unit	Qty.	Rate	Amount
7	Supplying and fixing 13Amp socket outlet with necessary concealed conduit wiring 7/0.53 (Cu/PVC/PVC) single wire 1.5mm2 1Cx2,7/0.53 (1.5mm2) Earth wire all complete as per instruction (Socket - ACL/Chint/Krypton/Orange) (Cable - ACL/Kelani/Orange/Sierra) (Conduit - Krypton/Polycrome) (fittings - krypton/Polycrome/Orange)	nr	3.00		
8	Supplying and fixing Water proof wall lamp shade(bulk head type) with, 9W LED bulb (efficacy: 85 lumen/W or above with two years warenty) and necessary concealed conduit wiring including one GANG sunk switch complete as per working order.(Switch -ACL/Chint/Krypton/Orange) (Cable -ACL/Kelani/Orange/Sierra) (fittings - krypton/Polycrome/Orange) (Conduit - krypton/Polycrome) (Bulb - Orange electric ECO LITE/ ZENOI/Kelani) [Cable SLS 733, Switch SLS 1000 Bulb SLS 984](Water proof wall lamp shade prime cost Rs.1650.00)	nr	2.00		
9	Supplying and fixing consumer unit 06 way surface mounted M.C.B type (incl.32 Amp. D.P MCB,40 Amp/30 mA-D.P RCCB, 6 nrs M.C.B (6 Amp16 Amp.)700 encloser box & bus bar fixing Philips screws (MCB-Make -Orange electric 10kA/Schneider/Chint NB 7/EB) (RCCB Make -Orange electric 10kA/Schneider/Chint NL1) (Enclosure- Polycrome) Original Makes with company warenty Certificate. all complete as per instruction	nr	1.00		
10	Supplying and fixing 2" dia galvanized iron earth pipe 6'-0"(1800 mm) long (heavy duty) and connected the7/1.04 earth wire (6mm2) with cable LUG. Including brick chamber with cover slab as per Drawing. (DB to Earth pipe cable/ conduit length 8 m) [Cable SLS 733] (Cable - ACL/Kelani/Orange/Sierra)) (for 30A, single/ three phase supplies only)	nr	1.00		
11	Supplying and fixing 2"x2"x1/4" Angle iron bracket for main supply electricity connection about 5'-0" long. Angle iron bar, bent to " L" shape and fixed to roof end with necessary bolt and nut. Apply two coats of anticorrosive paint to angle iron.	nr	2.00		
12	Supplying and fixing Ceramic pulley with "D" bracket for Electricity connection. all complete as per instruction	nr	4.00		
13	laying 25mm (0-1") conduits inside the slab all complete as per the instruction	m	10.00		
14	Supplying and fixing (7/1.04) (Cu/PVC/PVC) (Twin) Main wire (6mm2) (Cable - ACL/Kelani/Orange/Sierra) - Cable SLS 733	m	70.00		
15	Supplying & fixing 2 1/2" dia (5800mm long) GI Pipe(2.3mm thickness) pole (original company makes "Pakistan") including Gr 20 concrete &, two coats of anticorrosive paint& covered with welded steel plats or end cap to the top of pole. Rate to including drilling, erection, & installation all complete as per the instruction	nr	2.00		

D	Description	Unit	Qty.	Rate	Amount
6	Supplying and fixing 32 Amp 2 pole MCB incl; ABC 100 Box (Make -Orange electric 10kA/ Schneider/Chint NB 7 /EB) (Enclosure - Polycrome) Original Makes with company warenty Certificate. all complete as per instruction	nr	1.00		
	Total carried to summary				
	ROOF WORKS				
17	Ridging, Calicut pattern bedded in cement and lime mortar 1:1:4, colour to match tiles, Rate to include, keep went opening every vally point.(Tiles available at site) Single storied building.	m	22.00		
	Total carried to summary				
	CARPENTARY WORKS				
18	8"x3/4" (200x20mm) Boards , barge , valance, fascia, 3/4" (20mm) thick in class II local (Ginisapu) timber prepared by using multi purpose wood working machine , fixed complete with necessary 2" Iron screws .applying one coat of wood presavative, one coat of aluminium primer & two coats of enamal paint	m	44.00		
19	10" x 3/4 " Boards , barge , valance, fascia, 3/4" thick in class II local (Ginisapu) timber prepared by using multi purpose wood working machine , fixed complete with necessary 2" Iron screws applying one coat of wood presavative, one coat of aluminium primer & two coats of enamal paint	m	18.50		
	Total carried to summary				
	IRON WORKS				
220	Supplying and making 6 mm dia. M.S. rod grills for windows with 25x25x3 mm thick M.S. angle iron outer frame with 4 nr 25 x 25 x 3 mm angle iron(2 nr together) middle bar verticallly and 2 nr together 25 x 25 x 3 mm angle iron middle bar horizontally & 6 mm dia. M.S. rods weld to frame, at 75 mm C/C. & to 70° angle both ways, horizontal & vertical distance should be 75 mm & 200 mm respectively. Frame fixed to window openings with 1 1/2" iron screws & applying one coats of metal primer & 2 coats of approved quality enamel paint(different colour)(9'-3"x6'-0" size) all complet as per detail Draw. No :SPES/Rate23/Ir-21	sq.m	65.00		

D	Description	Unit	Qty.	Rate	Amount
221	Iron door with 6 mm dia. M.S. grill - Fabricating and fixing Iron door Door Frame with 32 x 32 x 6 mm angle Iron (Heavy quality) and Sash with 20 mm dia. G.I pipe outer frame (Heavy quality) with 1nr middle bar. 6mm M.S steel bars welded to upper part of sash frame at 75mm c/c bothways at 70° Angle .12x6 mm thick flat iron welded around the lower part of the frame and 2 nr 20x6 mm thick intermediate flat iron welded horizontally ,and 0.47 thick Zn/Al sheet fixed to flat iron frame with pop rivets. Door sash fixed to frame with 03nr 100 x75mm steel hinges. Applying one coat of metal primer and two coats of enamal paint(Differant colour) . Rate to include 6" Hasp and staple with approved quality 50mm Brass pad lock. Draw.No.SPES/Rate23/Ir-28.	sq.m	6.75		
	Total carried to summary				
	PAINTING WORKS				
22	Painting walls with one coats of wall filler (internal)(new work or after preparation of old wall)	sq.m	3.00		
	Total carried to summary				
	Toilet				
	EARTH WORKS				
		1			
23	Excavation for foundation by manually in any material except rock requiring blasting, part return fill in and ram, and disposing surplus within site as directed. (not exceeding 5ft depth)	cu.m	1.50		
	rock requiring blasting, part return fill in and ram, and disposing surplus within site as directed. (not exceeding 5ft	cu.m	1.50		
	rock requiring blasting, part return fill in and ram, and disposing surplus within site as directed. (not exceeding 5ft depth) Filling under floors with gravel or other approved quality of filling, spread, water and well rammed in 3"layers with				
223	rock requiring blasting, part return fill in and ram, and disposing surplus within site as directed. (not exceeding 5ft depth) Filling under floors with gravel or other approved quality of filling, spread, water and well rammed in 3"layers with available earth				
	rock requiring blasting, part return fill in and ram, and disposing surplus within site as directed. (not exceeding 5ft depth) Filling under floors with gravel or other approved quality of filling, spread, water and well rammed in 3"layers with available earth Total carried to summary				

ID	Description	Unit	Qty.	Rate	Amount
27	Manhole 2'-0"x 2'-0"x 2'-0" (internally) concreting base 4" thick & channels with 1:2:4 (3/4") ct. concrete including 2" thick, concrete screed with 1:3:6 (1") con. mixture.9" brick wall with 1:5 ct. mortar. Internally Plastered with 1:3, 3/4" thick ct. mortar with water proofing compound 10% (by cement) weight of cement as super latex 302 or equivalent finished smooth with neat ct. floating including channels & Pad plaster 1:3, 1/2" thick finished smooth with cement floating.shall be water tight. Rate to include for concrete cover slab 3" thick with 1:2:4 (3/4") con. mixture r/f with 10 mm dia. T.S rods @ 6" c/s. both ways, with 2 nos lifting handles. (as per Draw No.SPES/Rate23/Bk-13)	nr	2.00		
28	Construction of soakage pit 1200 x 1200 x 2700 mm (8'-6") invert depth, (8'-6" deep from the sewer pipe) Brick walls 225 mm thick in 1:5 ct: sand mortar, including 1:2 ct, & sand plastering 1/2" thick finished smooth with neat ct. floating up to a depth of 6" below from the invert level of the sewer pipe & surrund the con. pad . Concreting Ring beam, cover slab and pad (curb) with 1:2:4(3/4") conc. mixture. Reinforcing cover slab with 10.0 mm twisted deformed steel @ 6" cts. bothways and plastering curb 1:3 ct. & sand, 1/2" thick finished smooth with neat ct. floating 6" below ground level.inc: 2 nr of 10mm dia lifting handles (as per Draw No.SPES/Rate23/Bk-10.)	nr	1.00		
29	Cement concrete grill approved quality supply and fixing with cement slurry with one coat of filler and two coats of Wethershield paint.	sq.m	1.00		
	Total carried to summary				
	CONCRETE WORKS	.	,		
30	Cement concrete 1:2:4(3/4") (Gr.20 concrete) (R/F and Shuttering paid separately)incl: curing.Rate to include using mixture & vibrator-plinth beam,stiffner,copping	cu.m	0.80		
31	Roof flat cement concrete 75 mm thick 1:2:4(20 mm) mix, With 10.0mm dia. Tor Steel rods at 150 mm c/c both ways. Rate to include for15mm thick plywood formwork, side & soffit plastering with 1:3,10.0 mm thick ct. mortar, , and plastering top of the slab, 3/4" thick in cement, sand 1:3 with Water proofing compound(10% by weight of cement)as super latex-302 or equvalent finished smooth with cement floating. Rate to including 1"x3/4" copping(wehikenda)underside of the slab.	sq.m	7.50		
32	Cement concrete 1:2 1/2:5(1") mix:(Shuttering paid separately) incl: curing-floor	cu.m	0.65		
33	Cement concrete 1:3:6 (1")(Shuttering paid separately) incl: curing(Grade 15)	cu.m	0.60		
	Total carried to summary				

ID	Description	Unit	Qty.	Rate	Amount
	REINFORCEMENT WORKS				
34	12 mm&10mm Tor steel for plinth beam, stiffner, copping	kg	60.00		
35	6mm Steel for plinth beam copping & stiffner	kg	15.75		
	Total carried to summary				
	RRM WORKS				
36	Random Rubble Masonry in 1:5 cement mortar in structure (6"- 9" rubble)	cu.m	1.45		
	Total carried to summary				
	PAVING WORKS				
37	Wall Tiles glazed colour 300 x 600 mm with all specials, supplying and fixing to walls including raking plaster bedding 1:3 in tile mortar and pointed with tile grout to match the tiles. (Use Rocell tiles Prime cost Rs 980)as per the engineer's instruction.	sq.m	7.00		
38	300 x 600 mm Ceramic floor tiles(colour) with all specials supplying and fixing to floors including raking plaster and bedding in 1:3 cement mortar & pointed with tile grout.(Use Rocell tiles Prime cost Rs. 900)as per the engineer's instruction.	sq.m	3.00		
	Total carried to summary				
	PLASTER WORKS				
39	Cement Sand plastering to wall 1:5, (5/8") thick semi rough G: floor rate to include curing-external	sq.m	24.00		
40	Cement Sand plastering to wall 1:5, (5/8") thick semi rough G: floor rate to include curing-internal	sq.m	9.50		
41	1/2" thk 1:3 Cement Rendering finished smooth with neat cement floating, Ground floor(sand to be sieved with 1/8" nets) Rate to include curing	sq.m	5.75		
42	3/4" thk Rendering in Cement and sand 1:3 in floors finished smooth Rate to include curing, - Ground floor-plinth	sq.m	2.50		
43	Skirting in Cement mortar 1:3, 1/2" X 4" projected to wall finish with floating including forming groove. (G: floor)	m	4.50		
14	1:3 Rendering cement,1" thick cement copping finish smooth with neat cement floating (in Ground Floor)	sq.m	0.55		
			1		İ

ID	Description	Unit	Qty.	Rate	Amount
45	Applying skim coat(external) & one coats of wall filler for internal wall.(semi rough plastered new work or after preparation of old wall)	sq.m	9.50		
46	Painting walls with one coats of Acrylic wall filler for external wall (new work or after preparation of old wall)	sq.m	24.00		
47	Prepare and apply Skim coat(external), approved type one coat of filler and two of Wethershield paint to specified colour in smooth plastered surface of slab	sq.m	7.50		
48	Wethershield paint to external/internal faces of wall 02coat apply using roller brush 2" brush (ground Floor)	sq.m	33.50		
49	Painting plinth and skirting, copping with floor paint, 2 coats including preparing surface	sq.m	3.50		
	Total carried to summary				
	PLUMBING WORKS				
50	Supplying and fixing Closet with footrest, squatting type(Large), with trap .(OTTO / RSL or equivalent (Suitable fittings can be decided by the engineer depending on the site situation)	nr	2.00		
51	Suppling and fixing PVC 1/2"bib tap, (Water Tec/ S lon)	nr	2.00		
52	Supplying and fixing Pipes P. V. C. ½" - PNT 14 rate to include socket & joints and also include excavating backfilling or breaking wall or floor upto required depth	m	20.00		
53	Supplying and fixing Stop valve, Plastic 1/2" ."S-lon"/"Water Tec"	nr	1.00		
54	Supplying and fixing Bidet shower Plastic (water tec or equivalent)" with 1/2" angle valve PVC	nr	2.00		
55	P.V.C. pipes 110 mm dia.(4") type 250 laid under ground not exceeding 600 mm depth. Rate to include for necessary excavation, ct.Con. Bedding & covering with 1:3:6 (1") conc. mixture. Concrete Paid Seperately. For special purpose only	m	5.00		

ID	Description	Unit	Qty.	Rate	Amount
56	Supplying, fabricating and fixing Aluminium natural anodized fully composite board (Al/PVC Composite board) door with frame (1 Nr door sash) as per Drg. No. SPES/RATE23/D/04. Overall size of the door frame is 750x1950mm. (Size may be changed according to the site) Door frame consisting top and side bars (50x25x0.9mm box bars) with 18x11mm door stopper bar using 5/32x3/8" Al rivets and fixing with 38x38x2.5mm Al bracket using 1/8x3/8" Al rivets. Frame should be fixed to wall with 8 Nrs of No 6 rowl plugs and 8x3" ST screws. Door sash consisting top, sides, bottom and 2 Nrs of middle bars (50x25x0.9mm box bars). Sash frame should be fixed with 38x38x2.5mm Al bracket using 1/8x3/8" Al rivets, 3mm thick Al/PVC double side composite board for full door should be fixed using 1/8x3/8" Al rivets. Rate should be included for supplying and fixing required Mohair beading, 3 Nrs of 100x75mm Aluminium hinges using 5/32x3/8" Al rivets, 2 Nrs of Aluminium plate door handle, 2 Nrs of 2" Al Barrel Bolt, Screws, Pop rivets, Silicone etc.	sq.m	3.20		
	Total carried to summary FORM WORK				
57	Sawn timber (class II) formwork for sides of plinth beam,copping.	sq.m	6.50		
58	Shuttering for 0'-4 1/2"x0'-9"concrete stiffener including Class (II) timber planks and joists necessary props. (Rate to include dismantling same when required).	sq.m	2.00		
	Total carried to summary				

REPAIR OF THE 60'X20' BUILDING OF H/WAWEGAMA K.V.

SUMMARY


60x20 Building Renovation

Demolish Works	
Concrete Works	
Plaster Works	
Electrical Works	
Roof Works	
Carpentary Works	
Iron Works	
Painting Works <u>Toilet</u>	
Earth Works	
Brick Works	
Concrete Works	
Reinforcement Works	
RRM Works	
Paving Works	
Plaster Works	
Painting Works	
Plumbing Works	
Alluminium Works	
Form Works	
SUB TOTAL	

REPAIR OF THE 60'X20' BUILDING OF H/WAWEGAMA K.V.

(A)	BOQ Total	:	LKR
(B)	Less for Provisional Sums	:	LKR
(C)	Sub Total (A-B)	:	LKR
(D)	Less for Discount (If Any) (%)	:	LKR
(E)	Sub Total (C-D)	:	LKR
(F)	Add for Provisional Sums	:	LKR
	d Amount (E+F) ag VAT, Carried to Form of Bid))	:	LKR
Total Bi	d Amount in Words		
18 % V.	AT	:	LKR
Grand T	Fotal	:	LKR
Note:			
Bidders	are requested to provide discounts, if any, as a	ı pe	rcentage. Otherwise, it will be
converte	ed to a percentage. Your discount will also be applie	ed to	o variations in quantity."
Signatu	re of Bidder		

H/C/25/60/01		
11, 6, 23, 00, 01		
	SECTION 8	
	SECTION 6	
	DDAWINGS	
	DRAWINGS	

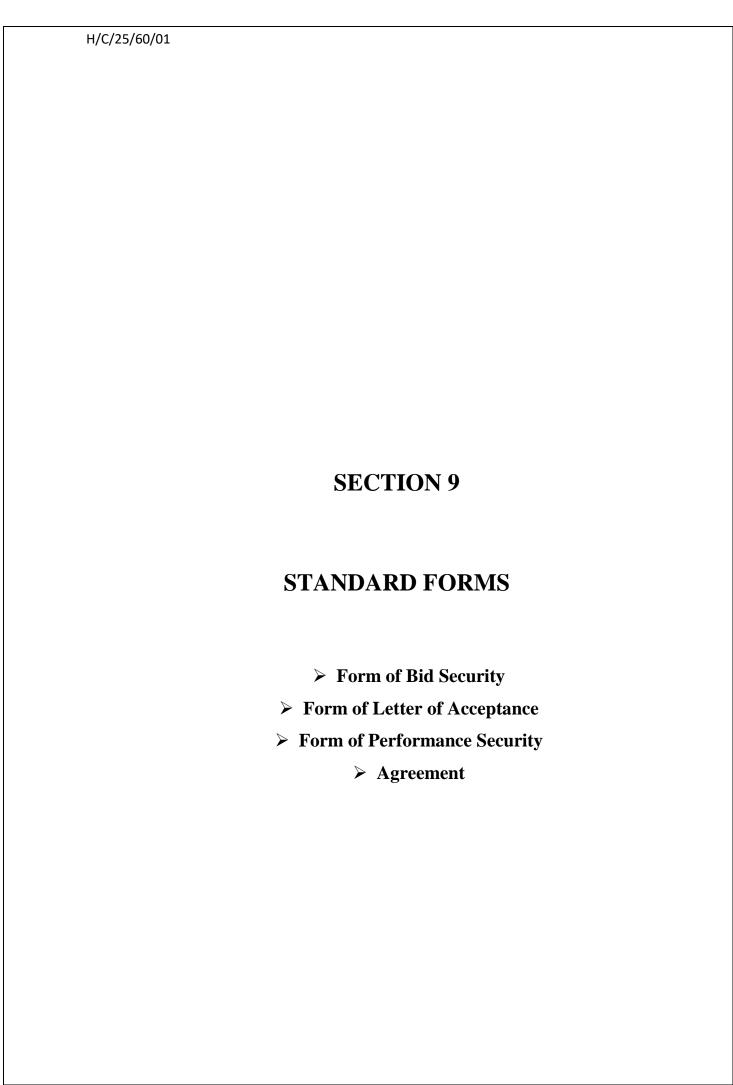

[Letter heading paper of the procuring entity]

BID SECURITY

	fuarantee form shall be filled in accordance with the instructions indicated in brackets] [insert issuing
	y's name, and address of issuing branch or office]
Benefi	iciary: Secretary, Ministry of Education, Southern Province.
Date:	[insert date (by issuing agency)]
BID G	GUARANTEE No.: [insert (by issuing agency) number]
[insert bid da execut	to the discovery been informed that
Further Guaran	ermore, we understand that, according to your conditions, Bids must be supported by a Bid ntee.
in total writing	request of the bidder, we
(a)	has withdrawn its Bid during the period of bid validity specified; or
(b)	does not accept the correction of errors in accordance with the Instructions to Bidders (hereinafter "the ITB"); or
(c)	having been notified of the acceptance of its Bid by the Employer during the period of bid validity, (i) fails or refuses to execute the Contract Form, if required, or (ii) fails or refuses to furnish the Performance Security, in accordance with the ITB.
Contra bidder	Guarantee shall expire: (a) if the bidder is the successful bidder, upon our receipt of copies of the act signed by the bidder and of the Performance Security issued to you by the bidder; or (b) if the is not the successful bidder, upon the earlier of the successful bidder furnishing the performance ty, otherwise it will remain in force up to (insert date)
	quently, any demand for payment under this Guarantee must be received by us at the office on or that date.
	ture(s) of authorized representative(s)

[Letter heading paper of the procuring entity]

LETTER OF ACCEPTANCE

[Date]
То:
[Name and address of the Contractor]
This is to notify you that your bid dated
[name of the Contract and identification number] for the Contract price ofLKR
[amount in figures and words] as corrected in accordance with Instructions to Bidders, is hereby accepted.
The adjudicator shall be
You are hereby instructed to proceed with the execution of the said Works in accordance with the Contract documents.
The Start Date shall be: (fill the date as per Conditions of Contract).
The amount of Performance Security is: (fill as per Conditions of Contract).
The Performance Security shall be submitted on or before
Authorized Signature :
Name and title of Signatory :
Name of Agency :

[Letter heading paper of the procuring entity]

PERFORMANCE SECURITY

[this Guarantee form shall be filled in accordance with the instructions is	indicated in brackets]
agency's name, and address of issuing branch or office]	[insert issuing
Beneficiary: Secretary, Ministry of Education, Southern Province.	
Date: [insert date (by issuing agency)]	
PERFORMANCE GUARANTEE No.:[inst	ert (by issuing agency) number]
We have been informed that [insert (by issuing agency) name of the contractor] (hereinafter called " Contract No [reference number of the contract] you, for the execution of Repair of the 60x20 building of H/Wawegar Contract").	the Contractor") has entered into dated with
Furthermore, we understand that, according to the conditions of the Conrequired.	tract a performance guarantee is
At the request of the Contractor, we [insert name of issuing agency] hereby irrevocably undertake to pay you in total an amount of [insert amount in figures] [insert amount in words] upon receip	any sum or sums not exceeding
writing accompanied by a written statement stating that the Contractor under the Contract, without your needing to prove or to show ground specified therein.	is in breach of its obligation(s)
This guarantee shall expire, no later than the day ofdays beyond the scheduled contract completion date] and any demand received by us at this office on or before that date.	
[signature(s) of authorized representative(s)	

AGREEMENT

This A	GREEMENT, made the	e [day] day of [month] 20 [year] between			
[name	and address of Emp	oloyer] (hereinafter called "the Employer") of the one part, and			
[name	and address of Contracto	or] (hereinafter called "the Contractor") of the other part.			
H/Way	wegama K.V. (hereinat	sires that the Contractor execute Repair of the 60x20 building of the called "the Works") and the Employer has accepted the Bid by the d completion of such Works and the remedying of any defects therein.			
NOW 7	ГНІS AGREEMENT WI	TNESSETH as follows:			
1.	assigned to them in the	words and expressions shall have the same meanings as are respectively ne Conditions of Contract hereinafter referred to, and they shall be deemed and construed as part of this Agreement.			
2.	In consideration of the payments to be made by the Employer to the Contractor as hereinafter mentioned, the Contractor hereby covenants with the Employer to execute and complete the Works and remedy any defects therein in conformity in all respects with the provisions of the Contract.				
3.	The Employer hereby covenants to pay the Contractor in consideration of the execution and completion of the Works and the remedying of defects wherein the Contract Price or such other sum as may become payable under the provisions of the Contract at the times and in the manner prescribed by the Contract.				
In Witness whereof the parties thereto have caused this Agreement to be executed the day and year aforementioned, in accordance with laws of Sri Lanka.					
Authorized signature of Contractor Authorized signature of Employer					
CO	OMMON SEAL	COMMON SEAL			
In the p Witnes	presence of: ses:				
1.	Name and NIC No.				
	Signature				
	Address				
2.	Name and NIC No.				
	Signature				
	Address				

Check List for Bidders

Bidders are advised to fill the following table:

ITEM	ITB	YES	REFERENCE
	Clause	(tick)	
Form of Bid			
Addressed to the Employer ?	18		
Completed?	18		
Signed?	18		
Bid Security (if required)			
Addressed to the Employer ?	16		
Format as required?	16		
Issuing Agency as specified?	16		
Amount as requested?	16		
Validity 28 days beyond the validity of Bid?	16		
Qualification Information			
All relevant information completed?	4		
Signed?	4		
Addendum			
Content of the addendum (if any) taken in to account?	10		
BID Package			
All the documents given in ITB Clause 12 enclosed in the original and copy?	12		
ITB Clause 19 followed before Sealing the Bid Package?	19		